

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 776 760 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
06.05.1999 Bulletin 1999/18

(51) Int. Cl.⁶: **B31D 5/00**, B65B 55/20

(21) Application number: 97200593.8

(22) Date of filing: 21.07.1995

(54) Cushioning conversion machine

Maschine zum Herstellen von stossabsorbierenden Elementen aus bahnförmigem Material

Machine de conversion de garniture d'emballage

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL
PT SE
Designated Extension States:
LT LV SI

(30) Priority: 22.07.1994 US 279149
07.06.1995 US 482015

(43) Date of publication of application:
04.06.1997 Bulletin 1997/23

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
95929320.0 / 0 785 862

(73) Proprietor: RANPAK CORP.
Concord, OH 44077 (US)

(72) Inventors:

- Harding, Joseph J.
Mentor, Ohio 44060 (US)
- Hoffman, Allan
Chagrin Falls, Ohio 44023 (US)
- Ratzel, Richard O.
Westlake, Ohio 44145 (US)

(74) Representative:

Powell, Timothy John et al
Eric Potter Clarkson,
Park View House,
58 The Ropewalk
Nottingham NG1 5DD (GB)

(56) References cited:

| | |
|-----------------|-----------------|
| WO-A-95/13914 | US-A- 4 174 237 |
| US-A- 4 237 776 | US-A- 4 619 635 |
| US-A- 4 781 090 | US-A- 4 922 687 |

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates generally to a cushioning conversion machine which converts paper stock into cushioning material, and more particularly, to a cushioning conversion machine having a controller which can be used to control a number of different machines and to record and to perform machine diagnostics.

[0002] In the process of shipping an item from one location to another, a protective packaging material is typically placed in the shipping container to fill any voids and/or to cushion the item during the shipping process. Some commonly used protective packaging materials are plastic foam peanuts and plastic bubble pack. While these conventional plastic materials seem to perform adequately as cushioning products, they are not without disadvantages. Perhaps the most serious drawback of plastic bubble wrap and/or plastic foam peanuts is their effect on our environment. Quite simply, these plastic packaging materials are not biodegradable and thus they cannot avoid further multiplying our planet's already critical waste disposal problems. The non-biodegradability of these packaging materials has become increasingly important in light of many industries adopting more progressive policies in terms of environmental responsibility.

[0003] These and other disadvantages of conventional plastic packaging materials have made paper protective packaging material a very popular alternative. Paper is biodegradable, recyclable and renewable; making it an environmentally responsible choice for conscientious companies.

[0004] While paper in sheet form could possibly be used as a protective packaging material, it is usually preferable to convert the sheets of paper into a low density cushioning product. This conversion may be accomplished by a cushioning conversion machine, such as those disclosed in U.S. Patent Nos. 4,026,198; 4,085,662; 4,109,040; 4,237,776; 4,557,716; 4,650,456; 4,717,613; 4,750,896; and 4,968,291. (These patents are all assigned to the assignee of the present invention and their entire disclosures are hereby incorporated by reference.) Such a cushioning conversion machine converts sheet-like stock material, such as paper in multi-ply form, into low density cushioning pads or dunnage.

[0005] A cushioning conversion machine, such as those disclosed in the above-identified patents, may include a stock supply assembly, a forming assembly, a gear assembly, and a cutting assembly, all of which are mounted on the machine's frame. During operation of such a cushioning conversion machine, the stock supply assembly supplies the stock material to the forming assembly. The forming assembly causes inward rolling of the lateral edges of the sheet-like stock material to form a continuous strip having lateral pillow-like portions and a thin central band. The gear assembly, powered by a feed motor, pulls the stock material through the

machine and also coins the central band of the continuous strip to form a coined strip. The coined strip travels downstream to the cutting assembly which cuts the coined strip into pads of a desired length. Typically, the cut pads are discharged to a transitional zone and then, either immediately or at a later time, inserted into a container for cushioning purposes.

[0006] By selectively controlling the gear assembly (i.e., by activating/deactivating its motor) and the cutting assembly, a cushioning conversion machine can create pads of a variety of lengths. This feature is important because it allows a single machine to satisfy a wide range of cushioning needs. For example, relatively short pad lengths can be employed in connection with small and/or unbreakable articles, while longer pad lengths can be employed in connection with larger and/or fragile articles. Moreover, a set of pads (either of the same or different lengths) can be employed in connection with uniquely shaped and/or delicate articles, such as electronic equipment.

[0007] Presently, a variety of length-controlling systems are used to control pad length. For example, a manual system is available in which a packaging person manually activates the gear assembly (i.e., steps on a foot pedal) for a time period sufficient to produce a coined strip of the desired length. He/she then manually deactivates the gear assembly (i.e., releases the foot pedal) and activates the cutting assembly (i.e., simultaneously pushes two appropriate buttons on the machine's control panel) to cut the coined strip. In this manner, a pad of the desired length is created. Alternatively, the system is designed so that a manual deactivation of the gear assembly (i.e., release of the foot pedal) automatically activates the cutting assembly.

[0008] Another technique used to control pad length is a time-repeat system. In such a length-controlling system, a timer is electrically connected to the gear assembly. The timer is set for a period (i.e., seconds) which, based on an estimated gear velocity, corresponds to the desired length of the pad. The timer is set by trial and error to obtain the desired pad length. The time-repeat system is designed to automatically activate the gear assembly for the selected period and thereby, assuming the estimated gear velocity is constant, produce a coined strip of the desired length. The system then deactivates the gear assembly and, if the automatic cut feature is enabled, then activates the cutting assembly to cut the coined strip into a first pad of the desired length. Thereafter, the system automatically re-activates the gear assembly to repeat the cycle so that, if the timer has not been disabled, a multitude of pads of substantially the same length are continuously created.

[0009] A further available length-controlling system is a removal-triggered system. This system is similar to the time-repeat system in that it deactivates the gear assembly based on the setting of a timer. However, with the removal-triggered system, the gear assembly is not automatically reactivated. Instead, it is only reactivated

when the cut pad is removed, either manually by the packaging person, mechanically by a conveyor or by gravity. Upon reactivation, another pad of the same length is produced unless the timer is disabled.

[0010] Yet another length-controlling system includes a length-selection system which allows a packaging person to select certain predetermined pad lengths. In such a system, a selection panel (e.g., a key pad) is provided with a plurality of length options (e.g., buttons) so that a packaging person can manually select the appropriate pad length. When a particular length option is selected, the gear assembly is automatically activated for a period of time (based on estimated gear velocity) corresponding to the selected pad length. At the expiration of this time period, the gear assembly is deactivated, and the cutter assembly is activated.

[0011] Due to the increased popularity of paper protective packaging material, manufacturers often employ a plurality of cushioning dunnage conversion machines with preset parameters to produce protective packaging for articles of different sizes and shapes. This arrangement often reduces setup time and allows a manufacturer to produce and ship out goods in a minimal amount of time. In addition, manufacturers now incorporate programmed controllers to control the operation of cushioning dunnage conversion machines. These controllers result in reduced manpower, more uniform products, lower production costs, less error, and a safer working environment.

[0012] The controllers operate by continuously monitoring its respective machine through employment of sensing circuits connected to the machine, which provide output signals to a pre-programmed processor to control the respective machine according to the manufacturer's specifications. Each different machine typically has a respective independent controller unique to that particular machine. Employing a different controller for each machine type often results in increased manufacturing costs and chances of error in manufacture, and complicates replacement and repair.

[0013] Further cushioning conversion machines are disclosed in US-A-4 619 635 and WO-A-95/13914 (a document in accordance with Art. 54(3) EPC).

[0014] It would be desirable to provide a single controller which could operate a variety of machine types without substantial adjustments or modifications to the controller. Such a universal controller would be less expensive to manufacture and easier to maintain because if it failed a technician would simply replace the circuit board of the controller and install a new one. It would also be desirable for a controller to collect and to store diagnostic information and to perform enhanced and automated packaging functions.

[0015] The disadvantages of the prior art are overcome in apparatuses and methods according to independent Claims 1, 23 and 25 appended hereto. Further, advantageous features of the invention are set out in the dependent sub-claims.

[0016] Embodiments of the present invention provide a cushioning conversion machine having a universal controller suitable for use in a variety of different configurations of a cushioning conversion machine with little or no change required of the controller. The universal controller includes a number of output ports for controlling the function of the cushioning conversion machine regardless of the cutting assembly employed or the operation mode selected for the universal controller. The cushioning conversion machine preferably includes a controller which communicates with various sensors and measuring devices to greatly increase the information available to the controller for recording and aiding in diagnostic and other functions.

[0017] In one embodiment of the invention, a cushioning conversion machine includes a feed assembly for feeding stock through the machine and converting it into a cushioning product, a cutting assembly for cutting the cushioning product and a universal controller which includes a plurality of sensing devices for sensing the occurrence of predetermined events, a plurality of output ports for controlling one of a plurality of possible cutting assemblies which may be employed with the cushioning conversion machine, a selector switch for selecting one of a plurality of control options, and a processor for controlling the employed cutting assembly in accordance with events detected by the sensing devices and the control option selected.

[0018] In another embodiment of the invention, a cushioning conversion machine includes a plurality of cutting circuits, each cutting circuit for controlling the supply of electrical power to a cutting apparatus, a plurality of mode detection circuits for detecting an operating mode of the cushioning conversion machine and for generating mode signals indicative of the detected mode, and a processor for controlling the operation of the cushioning conversion machine in accordance with the mode signals, the processor generating control signals for controlling the supply of electrical power to at least one of a plurality of the cutting circuits.

[0019] In another embodiment of the invention, a cushioning conversion machine for converting a sheet-like stock material into a dunnage product includes a frame having an upstream end and a downstream end, conversion assemblies, mounted on the frame, which convert the sheet-like stock material into a continuous strip of a dunnage product, a feeding assembly, mounted on the frame, for feeding the stock material through the conversion assemblies, a cutting assembly, mounted on the frame downstream of the conversion assemblies, which cuts the continuous strip of dunnage into a section of a desired length, and a controller for controlling operation of the feeding assembly and the cutting assembly, the controller including a selecting device for selecting the mode of operation of the feeding assembly and the cutting assembly, a processing device which generates control signals based on the selected mode of operation, and a controlling device which con-

trols the feeding assembly and cutting assembly in accordance with the generated control signals.

[0020] In another embodiment of the invention, a cushioning conversion machine for converting a sheet-like stock material into a dunnage product includes a frame having an upstream end and a downstream end, conversion assemblies, mounted on the frame, which convert the sheet-like material into a dunnage product, a feeding assembly, mounted on the frame, for feeding the stock material through the conversion assemblies, and a controller for controlling operation of the feeding assembly, the controller including a selecting device for selecting the mode of operation of the feeding assembly, a processing device which generates control signals based on the selected mode of operation, and a controlling device which controls the feeding assembly in accordance with the generated control signals.

[0021] In another embodiment of the invention, a cushioning conversion machine for converting a sheet-like stock material into a dunnage product includes a frame having an upstream end and a downstream end, conversion assemblies, mounted on the frame, which convert the sheet-like stock material into a continuous strip of a dunnage product, a feeding assembly, mounted on the frame, for feeding the stock material through the conversion assemblies, a cutting assembly, mounted on the frame downstream of the conversion assemblies, which cuts the continuous strip of dunnage into a section of a desired length, and a diagnostic device which monitors the operation of the machine, the diagnostic device including a sensing device for sensing the mode of operation of the feeding assembly and the cutting assembly, a processing device which determines improper operation of the feeding assembly and the cutting assembly for the sensed mode of operation and generates signals in accordance with such improper operation, and a displaying device which displays codes corresponding to the generated signals for improper operation.

[0022] In another embodiment of the invention a cushioning conversion machine for converting a sheet-like stock material into a dunnage product includes a frame having an upstream end and a downstream end, conversion assemblies, mounted on the frame, which convert the sheet-like stock material into a dunnage product, a feeding assembly, mounted on the frame, for feeding the stock material through the conversion assemblies, and a controller/diagnostic device for controlling and monitoring operation of the feeding assembly, the controller/diagnostic device including a selecting device for selecting the mode of operation of the feeding assembly, a processing device which generates control signals based on the selected mode of operation and which determines machine status and improper operation of the feeding assembly for the selected mode of operation and generates signals in accordance with such machine status and improper operation, a controlling device which controls the feeding assembly in

accordance with the generated control signals, and a displaying device which displays codes corresponding to the generated signals for machine status and improper operation.

5 [0023] In another embodiment of the invention, a cushioning conversion machine for converting a sheet-like stock material into a dunnage product includes a frame having an upstream end and a downstream end, conversion assemblies, mounted on the frame, which
10 convert the sheet-like stock material into a continuous strip of a dunnage product, a feeding assembly, mounted on the frame, for feeding the stock material through the conversion assemblies, a cutting assembly, mounted on the frame downstream of the conversion
15 assemblies, which cuts the continuous strip of dunnage into a section of a desired length, a code reader for reading a code printed on the stock material, and a controller which decodes information from the code read from the stock material and selectively controls the
20 operation of the machine as a function of the information.

[0024] In another embodiment of the invention, a cushioning conversion machine for converting a sheet-like stock material into a dunnage product includes a frame having an upstream end and a downstream end, conversion assemblies, mounted on the frame, which
25 convert the sheet-like stock material into a continuous strip of a dunnage product, a feeding assembly, mounted on the frame, for feeding the stock material through the conversion assemblies, a cutting assembly, mounted on the frame downstream of the conversion
30 assemblies, which cuts the continuous strip of dunnage into a section of a desired length, a probe for determining the packaging requirements of a particular container, and a controller which controls the feeding and cutting assemblies to produce the required sections of
35 dunnage product for the container as determined by the probe.

[0025] In another embodiment of the invention, a cushioning conversion machine for converting a sheet-like stock material into a dunnage product includes a frame having an upstream end and a downstream end, conversion assemblies, mounted on the frame, which
40 convert the sheet-like stock material into a dunnage product, a feeding assembly, mounted on the frame, for feeding the stock material through the conversion assemblies, and a controller/diagnostic device for controlling and monitoring operation of the feeding assembly, the controller/diagnostic device including a
45 processing device which determines machine status of the machine and generates signals in accordance with such machine status, a memory device for storing such machine status, and a communication device for communicating such machine status to a remote processor.

55 [0026] In another embodiment of the invention, a cushioning conversion network includes a supervisory controller communicating with a plurality of cushioning conversion machines which convert sheet-like stock

material into a dunnage product, each machine including a controller for controlling the operation of the machine in accordance with instructions received from the supervisory controller.

[0027] In another embodiment of the invention, a cushioning conversion network includes a plurality of cushioning conversion machines which convert sheet-like stock material into a dunnage product, each machine including a controller for controlling the operation of the machine, the controller of each machine being linked to the controller of at least one other machine for communication between the controllers.

[0028] In another embodiment of the invention, a cushioning conversion network includes a supervisory controller linked to a plurality of cushioning conversion machines which convert sheet-like stock material into a dunnage product, the supervisory controller controlling the operation of each machine.

[0029] In another embodiment of the invention, a cushioning conversion machine for converting a sheet-like stock material into a dunnage product includes a frame having an upstream end and a downstream end, a stock material supply assembly, conversion assemblies, mounted on the frame, which convert the sheet-like stock material into a continuous strip of a dunnage product, a feeding assembly, mounted on the frame, for feeding the stock material through the conversion assemblies, a cutting assembly, mounted on the frame downstream of the conversion assemblies, which cuts the continuous strip of dunnage into a section of a desired length, and an assembly for measuring the length of stock material supplied from the stock supply assembly to the conversion assemblies.

[0030] In another embodiment of the invention, a cushioning conversion machine includes a frame, conversion assemblies which are mounted to the frame and which convert a stock material into a cushioning product, and a length measuring device which measures the length of the cushioning product as it is being produced, the conversion assemblies including a rotating conversion assembly, the angular movement of this assembly directly corresponding to the length of the cushioning product, the length measuring device being positioned to monitor the angular movement of the rotating conversion assembly and thus the length of the cushioning product.

[0031] Thus embodiments of the invention comprise the foregoing and other features hereinafter fully described and particularly pointed out in the claims, the following description and the annexed drawings setting forth in detail a certain illustrated embodiment of the invention, this being indicative, however, of but one of the various ways in which the principles of the invention may be employed.

[0032] In the annexed drawings:

Figure 1 is an illustration of a cushioning conversion machine;

Figure 2 is a block diagram of a universal controller for a cushioning conversion machine in accordance with the present invention;

Figures 3 through 8 are electrical schematic diagrams of an embodiment of the universal controller; Figure 9 is a block diagram of a controller for a cushioning conversion machine with enhanced diagnostic capabilities;

Figure 10 is a front view of a length measuring device and other relevant portions of the cushioning conversion machine;

Figure 11 is a side view of the length measuring device;

Figure 12 is a block diagram of a controller including a code reader for reading information from stock paper and a container probe for determining packaging information from a container to which packaging is to be added;

Figure 13 is a block diagram of a fault tolerant cushioning producing network; and

Figure 14 is an illustration of two cushion producing machines positioned at either end of a conveyor and communicating via a network.

[0033] With reference to the drawings and initially to Figure 1, there is shown a cushioning conversion machine 10 including a frame 12 upon which the various components of a conversion assembly 14 are mounted and a controller 16 (illustrated schematically) for controlling the machine including the components of the cushioning assembly. The frame 12 includes a stock supply assembly 18 which holds a roll of stock for conversion by the conversion assembly 14 into a cushioning material. The conversion assembly 14 preferably includes a feed assembly 19 which includes a forming assembly 20 and a gear assembly 22 powered by a feed motor 24, a cutting assembly 26 powered by, for example, a cut motor 28 selectively engaged with the cutting assembly by an AC solenoid driven clutch 30 and a post cutting constraining assembly 32.

[0034] During the conversion process, the forming assembly 20 causes the lateral edges of the stock material to roll inwardly to form a continuous strip having two lateral pillow-like portions and a central band therebetween. The gear assembly 22 performs a "pulling" function by drawing the continuous strip through the nip of two cooperating and opposed gears of the gear assembly thereby drawing stock material through the forming assembly 20 for a duration determined by the length of time that the feed motor 24 rotates the opposed gears. The gear assembly 22 additionally performs a "coining" or "connecting" function as the two opposed gears coin the central band of the continuous strip as it passes therethrough to form a coined strip. As the coined strip travels downstream from the gear assembly 22, the cutting assembly 26 cuts the strip into sections of a desired length. These cut sections then travel through the post-cutting constraining assembly 32.

[0035] The controller 16 is preferably "universal" or capable of use in a number of differently configured cushioning conversion machines without requiring substantial change to the controller. Accordingly, one configuration of a universal controller 16 can thus be manufactured for a variety of different cushioning conversion machines. The assembly technician then need not adapt the controller 16 to a specific configuration of the cushioning machine, such as when one of the particular cushioning machines is adapted to use an air powered cutting assembly, a direct current powered solenoid cutting assembly, or a motor driven cutting assembly. The capability of the universal controller to control differently configured machines reduces assembly time, reduces assembly cost since the labor cost in specifically configuring a controller often outweighs the cost of assembling unused electrical components in the controller and reduces the possibility of assembly error. Moreover, repair of the machine is facilitated since training of the repair technician is minimized and since an inventory of universal controllers for use in a variety of cushioning machines can be maintained.

[0036] An exemplary universal controller 16 is illustrated in Figure 2 and includes a number of different output ports 36, 38, 40, 42, 44 and 46 devoted to providing a control signal from a microprocessor 48 to a DC shear solenoid, an AC control solenoid, a cut motor, a feed motor, a counter and a spare port, respectively, in accordance with a number of inputs 50. While the microprocessor 48 is illustrated and described herein as a single device, it is noted that microprocessor 48 may be embodied as a number of microprocessors or control units of the same type or as different microprocessors adapted for performing certain functions. The DC shear solenoid, controlled by the microprocessor 48 through DC shear solenoid port 36, powers a cutting blade positioned at the output of a cushioning conversion machine. When the DC shear solenoid is provided power by a control signal sent through the port 36, the solenoid actuates a cutting blade to force the blade through the dunnage to make a cut. One machine employing a cutting assembly powered by a DC solenoid is marketed by Ranpak Corp. under the name PadPak® and is disclosed in U.S. Patent No. 4,968,291 which is incorporated herein by this reference.

[0037] The AC control solenoid port 38 controls an external AC solenoid which is typically used in conjunction with either an air-powered cutting assembly or a motor powered cutting assembly. When a cushioning conversion machine including the universal controller 16 employs an air-powered cutting assembly, the cutting assembly uses the AC solenoid to control the supply of pressurized air to an air cylinder which drives a cutting blade to shear off a section of dunnage fed through the machine. A cushioning conversion machine employing an air-powered cutting assembly is marketed under the name PadPak® by Ranpak Corp. and disclosed in U.S. Patent No. 4,968,291 which has been incorporated

herein above. The AC control solenoid port 38 may also be used to control an AC solenoid which acts to couple the direct drive cut motor 28 to the cutting assembly 26 via the clutch 30 to drive a cutting blade through a cutting stroke to cut a section of dunnage material fed through the machine. One such machine is marketed by Ranpak Corp. under the name AutoPad® and is disclosed in U.S. Patent No. 5,123,889 which is also incorporated herein by this reference. In this embodiment of a cushioning conversion machine, the cut motor port 40 is used to supply a signal to the cut motor 28 to ensure that the cut motor is running when a cut is desired.

[0038] In any of the embodiments of a cushioning conversion machine described above, there is employed some means for moving the paper material through the machine to create the dunnage material. The PadPak® and AutoPad® machines referenced above employ the feed motor 24 which turns the enmeshed gears 22 that grip the paper stock and feed it through the machine where the appropriate conversion of the sheet-like stock to a dunnage product and the cutting of the dunnage product into appropriate lengths takes place. The universal controller 16 controls the feed motor 24 through the feed motor port 42. When it is desired that an appropriate length of paper be fed through the cushioning conversion machine by the feed motor 24, the microprocessor 48 sends a signal through the feed motor port 42 which causes power to be supplied to the feed motor for as long as the signal is present. When the microprocessor 48 has determined that the desired length of paper stock has been fed through the machine 10, the signal is disabled causing the feed motor 24 to stop and the supply of paper through the machine to stop. At this time the microprocessor 48 will determine, based on the position of the mode selection switch 52 and the condition of the input signals 50, whether to initiate a cut of the dunnage material fed through the machine 10, as is described more fully below.

[0039] Depending upon the embodiment of the cushioning conversion machine 10, the universal controller 16 may also use the counter port 44 to control a counter which keeps track of the machine usage or a spare port 46 which can be used to provide command signals to some other device.

[0040] While the universal controller 16 includes the output ports 36 through 46 for the control of the feed motor 24 and a variety of cutting assemblies, in most applications less than all of the ports will be used. For example, when the universal controller 16 is used to control a cushioning conversion machine having a DC shear solenoid powered cutting assembly, such as the PadPak® machine mentioned above, the DC shear solenoid port 36 is used while the AC control solenoid port 40 and the cut motor port 16 will not be used. When the universal controller 16 is used to control a machine 10 having an air powered cutting assembly, the AC control port 38 is employed to control the AC control solenoid, and the DC shear solenoid port 36 and the cut

motor port 40 may be unused. Similarly, when the universal controller 16 is used in conjunction with a cushioning conversion machine using the cut motor 28 to actuate the cutting assembly 26, such as the AutoPad[®] machine mentioned above, the AC control solenoid port 38 and cut motor port 40 will be used to control and power the cutting assembly 26 while the DC shear solenoid port 36 will be unused. Preferably, the microprocessor 48 will more or less simultaneously cause appropriate signals to be sent to each of the respective output ports 36, 38, 40 regardless of the actual cutting assembly employed with a machine. In this way the microprocessor 48 does not need to be informed of this aspect of the configuration of the machine and the cutting assembly 26 connected to a port will thus be the one that responds to a signal sent from the microprocessor without the microprocessor having to distinguish which type of cutting assembly is employed.

[0041] Control of the various devices, such as the DC shear solenoid and the cut and feed motors, is performed by the microprocessor 48 in accordance with certain inputs 50 which are indicative of the operating condition of the cushioning conversion machine 10 and certain events which may have been sensed. The inputs 50 also include an indication of the operating mode for the cushioning conversion machine selected through the mode selection switch 52, such as a rotary switch. The mode selection switch 52 includes a number of settings corresponding to different operating modes, for example, keypad mode, electronic dispensing system mode, automatic cut mode, feed cut foot switch mode, and automatic feed mode. The mode setting of the controller 16 as well as a number of error signals may be displayed as alphanumeric codes on the display 54. For example, a display code of '1' may indicate to an operator that the machine 10 is operating in the automatic feed mode, while a display of "A" may indicate that an error has occurred in the buttons used to manually command a cut.

[0042] The keypad mode is for cushioning conversion machines which are equipped with a keypad through which an operator may input the length of each pad which she desires the machine to produce by depressing the appropriate key on the keypad. In this mode, regardless of the cutting assembly employed, the microprocessor 48 provides a signal to the feed motor through the feed motor port 42 to feed material through the machine for the appropriate length of time to provide dunnage of the length which the operator selected through the keypad. The keypad buttons are preferably pre-programmed so that each button corresponds to a particular cut length. For example, if an operator pushes button 12 on the keypad, and this button was preprogrammed to correspond to a length of 12 inches, the microprocessor 48 will signal the feed motor 24 and turn the feed motor on for a length of time that equates to 12 inches of dunnage material being fed out, and then the microprocessor will disable the feed motor. Upon com-

pletion of the dunnage material of the selected length being fed through the machine, the microprocessor 48 automatically commands the cutting assembly 26 employed, through the output ports 36, 38, and 40, to perform a cut. The microprocessor 48 then waits for the next key on the keypad to be depressed and repeats the process to produce a length of dunnage corresponding to the key depressed.

[0043] When the electronic dispensing system (EDS) mode setting is selected on the mode selection switch 52, an external electronic dispensing sensor is employed to detect the presence or absence of a dispensed length of dunnage material. The information as to the presence or absence of dunnage material is provided to the microprocessor 48 through one of the inputs 50. If the sensor detects that there is no dunnage material left at the cutting area of the machine, this information is passed to the microprocessor 48 which will send a signal to the feed motor 24 through the feed motor port 42 to feed out a certain length of material. The length of material to be fed through the machine 10 is determined by the setting of a thumb wheel, which is described below, as reported to the microprocessor 48 over one of the inputs 50. Once material is fed through the machine 10 and emerges at the cutting exit, the electronic dispensing sensor will report to the microprocessor 48 the presence of the dunnage material at the cutting exit of the machine. After the complete length of material has been fed through the machine 10 by the feed motor 24, the microprocessor 48 will wait a short period of time to allow the feed motor to stop and will then send a signal over the necessary output ports to command a cut to be performed by the attached cutting assembly 26. The electronic dispensing assembly will continue to report to the microprocessor 48 the presence of the dunnage material at the exit of the machine until the material is removed. Upon removal of the material, the sensor will report the removal to the microprocessor 48 through the inputs 50 whereupon the microprocessor will send a signal to the feed motor 24 again to feed another length of dunnage material through the machine and once the feed is complete the microprocessor will send a signal over the required output ports to cause the cutting assembly 26 to cut the material. This process will continue as long as the operator continues to remove the cut dunnage from the exit area of the machine.

[0044] The automatic cut mode selection on the selector switch 52 causes the microprocessor 48 to perform basically the same process set forth above for the EDS mode with the exception that an operator need not remove a length of dunnage material from the machine in order for the next length to be fed through the machine and cut. In this mode the microprocessor 48 commands the feed motor 24 through the feed motor port 42 to feed material through the machine for a length of time determined by the setting of the thumb wheel. Once the desired length of material has been fed

through the machine, the microprocessor 48 will disable to signal to the feed motor 24, will wait a short period of time to allow the feed motor to stop and then will send the appropriate signals to the output ports 36, 38, 40 controlling the respective cut assemblies 26. The microprocessor 48 will cause predetermined lengths of material to be fed and cut by the machine continuously in this mode unless a predetermined number of lengths has been selected by the operator.

[0045] When the feed cut foot switch mode is selected on the mode selection switch 52, the control of the machine by the microprocessor 48 will be as instructed by an operator actuated foot switch. When an operator depresses the foot switch, an input indicating the fact is sent to the microprocessor 48 through one of the inputs 50. In response, the microprocessor 48 will send a signal to the feed motor 24 through the feed motor port 42 to feed material through the machine. The signal sent to the feed motor 24 by the microprocessor 48 will continue until the operator lets the pressure off of the foot switch at which time the microprocessor will disable the signal to the feed motor, will wait a short period of time to allow the feed motor to stop and then will send a signal to the output ports 36, 38, 40 operating the cutting assemblies 26 to cut the material fed through the machine.

[0046] The fifth mode of the mode selection switch 52 is the auto feed mode. In the auto feed mode the microprocessor 48 signals the feed motor 24 through the feed motor port 42 to feed a length of paper through the machine as determined by the position of the thumb wheel. After the appropriate length of dunnage material has been fed through the machine, the microprocessor will pause until a cut is manually requested. In this mode the operator must then instruct the microprocessor to signal the cut assembly to perform a cut. The operator preferably causes a cut to occur by manually depressing two cut buttons simultaneously. When the buttons have been depressed, both inputs are sent to the microprocessor 48 over the input lines 50 and, provided the buttons have been pushed near simultaneously, the microprocessor will send a signal through the appropriate outputs to the cutting assembly 26 employed on the machine to cut the material. After a cut has been completed, the microprocessor 48 will again send a signal to the feed motor 24 to cause the selected length of material to be fed through the machine and will then wait for the operator to instruct that a cut be made.

[0047] An embodiment of the universal controller 16 described above is shown in the schematic circuit diagram of Figures 3 through 8. Turning first to Figures 3 through 5, the interaction between the microprocessor 48 and output ports 36 through 46 is shown. The microprocessor 48 may be any one of a number of commercially available general purpose processing chips and preferably one suitable for convenient interface with the output ports 36 through 46 and the inputs 50 through a storage memory 60, such as a programmable periph-

eral device that may include ROM, RAM and I/O ports. The microprocessor 48 is also provided with keypad inputs 62 to which a keypad may be attached when the universal processor 16 is desired to operate in the keypad mode. To control the various output ports the microprocessor stores the appropriate signal value in a location in the memory 60 accessible to the appropriate output port. For example, to send a signal to the feed motor 24 through the feed motor port 42, the microprocessor 48 will place the desired signal value in a location in the memory 60 accessible by the line 62, to send a signal to the cut motor 28 through the cut motor port 40 the signal value will be placed in a location accessible by the line 66, and to send a signal to the DC shear solenoid through the DC shear solenoid port 36 or to the AC control solenoid through the AC control solenoid port 38 the signal value is placed in a memory location accessible by the line 64. When a control signal is sent to the feed motor port 42 to cause the feed motor 24 to run, an hour meter 68 may also be activated which keeps track of the run time of the cushioning conversion machine. To control the spare output port 46 or the counter port 44 (see Figure 5), the microprocessor 48 places a signal value in a location in the memory 60 accessible by these ports or devices.

[0048] It is noted that since the cushioning conversion machine 10 in which the universal controller 16 is employed will be used with only one cutting assembly 26, the output ports which control a cutting assembly may be shared by different types of cutting assemblies, for example the AC control solenoid port 38 may control an air powered cutting assembly or the engagement clutch 30 of the cut motor 28 powered cutting assembly 26, or a single control line may control more than one output port as the control line 64 is shown to control both the DC shear solenoid port 38 and the AC control solenoid port 14. Further, while only a single cutting assembly 26 is employed by a machine 10 at a time, more than one control line may be used to control a single cutting assembly or to provide other control over the machine. In the instance where the cushioning conversion machine 10 is employed with a cut motor 28, both the control lines 64 and 66 are used to actuate a cut. The control line 66 instructs the cut motor 28 through the cut motor port 40 to run while the control line 64 instructs the AC control solenoid through the AC control solenoid port 38 to engage the clutch 30 coupling the cut motor 28 and the cutting blade assembly 26. The control lines 62 and 64 are also used cooperatively to ensure that the feed motor 24 is not operating when a cut has been initiated as this may cause the dunnage material to become jammed in the machine. A pair of transistors 70 and 72 are interconnected with the control lines 62 and 64 so that the feed motor 24 and a cutting assembly 26 cannot both be actuated simultaneously as the presence of a signal on one control line disables the other control line.

[0049] The inputs 50 to the microprocessor 48 are

generated through a variety of circuits as shown in Figures 6 through 8. Figure 6 illustrates the thumb wheel circuit 76 discussed above. A two-digit thumb wheel 78 is coupled to the input bus 50 via the bus interface 80 and control line 82 and allows the operator to select the time during which the microprocessor 48 will command the feed motor 24 via control line 62 and feed motor port 42 to run, and thus the length of dunnage material to be fed through the machine, during the EDS mode, automatic cut mode and the automatic feed mode. The selected feed length is sent to the microprocessor 24 over the input bus 50. Shown in Figures 6 through 8 are a number of current sensing circuits which provide additional inputs over the input bus 50 that inform the microprocessor 48, through the memory 60, of various operating events of the cushioning conversion machine, e.g. whether a cut has been completed, whether the foot switch is depressed or whether a cut button has been depressed, etc., as well as the selected mode of operation for the universal controller 16.

[0050] The current sensing circuits are each of a similar construction but sense unique occurrences. An exemplary current sensing circuit generally includes a contact 84 which receives current when a particular event specific to that sensing circuit occurs. When such an event occurs, current passes through the contact 84 to a capacitor 86 connected in electrical parallel to a pair of diodes 88 of an opto-coupler 90 arranged in reverse parallel. When current is detected across the diodes 88, indicating that the event which the particular sensing circuit is designed to sense, light from the diodes turns on the phototransistor 92 which causes the transistor to couple a constant voltage source 94, filtered by a resistor-capacitor filter 96, to an input 98 to the bus interface 100. The bus interface 100 provides the appropriate input to the memory 60 over the input bus 50 as controlled by control line 102.

[0051] Turning then to the specific sensing circuits, the sensing circuit 104 (RELAYS ON) detects whether the cushioning conversion machine has been reset and whether all safety switches are closed indicating that the cover, etc., of the machine is closed. The status of the detection is then sent to the microprocessor 48 via the memory 60 as an input on the input bus 50.

[0052] The circuit 106 (FEED REV) senses when an operator has pressed a reverse push button which allows the operator to reverse the rotation direction of the feed motor 24. The purpose of the feed reverse function is to provide a means for clearing a dunnage material jam. Oftentimes, the jammed dunnage can be cleared by simply reversing the feed motor and pulling the dunnage material away from the cutting assembly where jams most often occur. The status of this sensing circuit 106 is also reported to the microprocessor 48 over the input bus 50 through the memory 60.

[0053] The circuit 108 (CUT COMP) senses the status of a cut complete switch. Cutting assemblies using a DC solenoid to drive a cutting blade have an attribute of

heating up quickly as power is continually applied to the solenoid. When such a solenoid heats up too much, it loses power and cannot cut as effectively as it can when in a cooler state. The cut complete switch detects whether a cut of the dunnage material has been completed. The sensing circuit 108 senses the status of the cut complete switch and reports the status to the microprocessor 48 so that the microprocessor can immediately discontinue the supply of power to the DC shear solenoid by sending an appropriate signal to the DC shear solenoid port 36 over the control line 64.

[0054] The position of the foot switch used when the universal controller 16 has been set to the feed cut foot switch mode is sensed by the sensing circuit 110 (FEED FS). The sensing circuit 110 senses the position of the foot switch and reports the position to the microprocessor 48. As discussed above, when in the foot switch mode, if the foot switch is depressed, the microprocessor 48 will signal the feed motor 24 through the feed motor port 42 and control line 62 to continually feed paper through the machine 10 while the foot switch is depressed. Upon the pressure on the foot switch being released, the sensing circuit will report to the microprocessor 48 that the foot switch has been released and the microprocessor will discontinue the signal to the feed motor causing the feed motor to stop and then the microprocessor will send out a signal to the output ports 36, 38 and 40 over the control line 64 and 66 prompting the attached cutting assembly 26 to perform a cut.

[0055] The circuit 112 (BLADE) senses the status of a blade switch. The blade switch detects whether the knife blade is in its normal at rest position or if the knife blade is at some other point, such as partially through a cut. If the knife blade is at its rest-position, it is safe-to-feed paper through the machine 10, otherwise if the knife blade was partially through a cut and paper was fed, the paper could feed into the blade and jam the machine. The position of the knife blade as sensed by the circuit 112 is reported to the microprocessor 48 which will disable signals to the feed motor 24 until the circuit 112 has sensed that the knife blade has returned to its rest position.

[0056] The circuit 114 (EDS SEN) senses the presence or absence of dunnage material at the cutting assembly 26 area of the cushioning conversion machine 10 and reports the information to the microprocessor 48. When the universal controller 16 is in the EDS mode, the microprocessor 48 will automatically signal the feed motor 24 to feed a length of dunnage material determined by the thumb wheel circuit 76 (Figure 6) through the machine 10 and signal the attached cutting assembly 26 to cut the material after the appropriate length has been fed whenever the circuit 114 senses that the last length of dunnage material fed has been removed from the exit area.

[0057] Continuing the description of the sensing circuits with reference to Figure 8, the sensing circuits 116 (L-CUT), 118 (R-CUT) and 120 (COM-CUT) correspond

total time the feed motor is operating in reverse. The real-time clock 228 can also be used to time and date stamp occurrences of faults detected by the microprocessor 48.

[0066] All information received by the microprocessor 48 may be stored in a non-volatile memory 230 for later retrieval. When desired, the information stored in the non-volatile memory 230 may be accessed from a remote location 226 through communication between the remote processor 218 and the microprocessor 48 over the modems 220 and 222. The modems 220 and 222 may be conventional commercially available modems communicating over a telephone link 224 through conventional communications protocols as would be appreciated by those skilled in the art.

[0067] The information stored in the non-volatile memory 230 of the controller 216 may be automatically downloaded to the remote processor 218 at pre-planned timed intervals, for example, at the end of a day, or the end of a week. Alternatively, a service person at the remote location 226 can instruct the microprocessor 48 through the connection with the remote processor 218 via the modems 220 and 222 to download the information stored in the non-volatile memory 230 to the remote processor 218 as desired. Further, the connection between the remote processor 218 and the microprocessor 48 allows a service person to view in near real-time the status of all of the machine inputs 50, corresponding to the sensors and other inputs described above, while the machine is running. This enables the service person to diagnose effectively errors in the machine 10 since the service person is able to look at the inputs 50 as an error is occurring. The information downloaded to the remote processor 218 from the non-volatile memory 230 can also be used to schedule maintenance for the machine and to perform billing functions in instances where a customer is charged for use of the machine 10 based on its operating time, on the amount of paper fed through the machine, or on the length or number of pads produced by the machine.

[0068] In instances where a service person is at the site of the cushion conversion machine 10 it is also possible to access the non-volatile memory 230 through the same port provided for communication with the remote processor 218. In such a case instead of the modem 220 being connected to the microprocessor 48, a personal computer or other terminal may be connected to the microprocessor 48 for access to the information stored in the non-volatile memory 230. This allows a service person more access to the informational inputs 50 to the microprocessor 48 during servicing of the machine.

[0069] In instances where a customer is charged for usage of the machine based on the amount of paper used it may be desirable to provide a paper usage meter 232 in communication with the microprocessor 48. While it is possible for the microprocessor 48 to keep a running total of paper used by the machine in the non-

volatile memory 230 by indirectly measuring the time that the feed motor is running as determined by the real time clock 228 and by multiplying that time by the paper speed, provided that the speed of the feed motor is known and constant, in some instances the paper usage may be more accurately determined by use of the paper usage meter 232. Such a meter may include a contact roller which rolls along the paper fed into the machine to directly measure the length of paper used or may be embodied through some other conventional means of measuring length. The paper usage, as well as other information stored in the non-volatile memory 230 may be made available for display when desirable on the display 54 as well as through the remote processor 218 as is described above.

[0070] Where it is desired to accurately determine the amount of dunnage product or padding produced by a machine, such as for billing purposes or when the length of the pad to be produced must closely fit within a container, the machine 10 may be provided with a length measuring device 234. An embodiment of a length measuring device is shown in Figures 10 and 11 and more fully described in co-owned U.S. Patent Application Serial No. 08/155,116, which is incorporated in its entirety by this reference. The illustrated length measuring device 234 is positioned to monitor the angular movement of the gear assembly 22. The length measuring device 234 includes a rotating member 280 which is attached to the gear shaft 281 and a monitor 282 which monitors the angular motion of the member 280, and thus the gear shaft 281. Preferably, the rotating member 280 is a disk with a series of openings 284 arranged in equal circumferential increments. More preferably, the rotating member 280 is a black, non-reflective, aluminum disk with twelve openings. In this manner, each opening 284 will correspond to a 30° angular movement and, in the preferred embodiment, one inch of pad length.

[0071] The monitor 282 comprises a photo-optic transmitter/receiver 286 which transmits and receives light beams and a reflector 288 which reflects the transmitted light beams. The transmitter/receiver 286 is mounted on the machine frame and is positioned so that, as the rotating member 280 turns, transmitted light beams will travel through the openings 284. The photo-optic transmitter/receiver 286 preferably includes electrical circuitry capable of relaying interruptions in the receipt of light beams. The reflector 288 is mounted on the machine frame and is positioned to receive transmitted light beams which travel through the openings 284.

[0072] As the rotating member 280 turns, light beams transmitted by the transmitter/receiver 286 will pass through a first opening 284, contact the reflector 288, and reflect back to the transmitter/receiver 286. Once this opening 284 rotates out of alignment with the transmitter/receiver 286 (and the reflector 288), the receipt of reflected light beams by the transmitter/receiver 286 will be interrupted until the next opening 284 moves into

alignment. Thus, with the preferred rotating member 280, twelve interruptions would occur for every revolution of the member 280, and thus for every revolution of the drive gear shaft 281.

[0073] The transmitter/receiver 286 relays the occurrence of an interruption to the processor 48 (Figure 9) in the form of a pulse. The processor 48 uses this information to control the gear assembly 22 (i.e., to send activation/deactivation signals to the feed motor over the feed motor port 42) and thus uses this information to control pad lengths as well as to determine and store in the non-volatile memory 230 the total length of pad produced.

[0074] Referring to Figure 12, there is shown a controller 216' substantially the same as the controller 216 described above and including a paper code reader 300 and a container probe 302. While the controller 216' is illustrated with only the code reader 300 and container probe 302 and the non-volatile memory 230, the controller may also include the modem 220 for communication with a remote processor 218, the real-time clock 228, the paper usage meter 232 and the length measuring device 234 described with reference to Figure 9. The paper code reader 300 and the container probe 302 may also be used separately or together.

[0075] The paper code reader 300 reads information encoded on the stock paper 304 as the paper is fed through the machine prior to the paper entering the conversion assembly 20 in order to identify or to verify the stock paper type, source or lot. Such information may aid the service person in diagnosing machine problems, such as problems which have occurred among machines using a particular paper lot, or may be used to determine information regarding the cushioning properties of a pad formed from such paper as may vary between, for example, single or multi-ply paper stock. The latter type of information may be of particular value where the machine 10 automatically determines and produces the amount of pad to adequately cushion a given container. The controller 216' may in some instances be adapted to produce pads only upon the verification of certain types of stock paper by the paper code reader 300, such as to as an example prevent damage to the machine 10 from the use of inappropriate stock paper material.

[0076] The paper code reader 300 is preferably a conventional bar code reader with the stock paper bearing an appropriate bar code encoded with the desired information. The paper code reader 300 can also be used to supply paper length information to the processor 48 when the bar codes are printed on the stock paper 302 at known spatial intervals or are encoded with length information. The paper code reader 300 may also be another type of information retrieval system including, for example, an optical code reader other than a bar code reader or a reader adapted to read or to detect the presence of encoded information using ultraviolet light.

[0077] Information detected from the paper stock 304

by the paper code reader 300 is transferred to the processor 48 where it may be acted upon and/or, as desired, stored for latter retrieval from the non-volatile memory 230. The number of rolls or amount of stock paper used from a particular source or the number of rolls or amount of stock paper used of a certain grade, thickness or ply are examples of useful information for storage in the non-volatile memory 230.

[0078] The container probe 302 may be embodied as a code reader such as a bar code reader which reads information from a container 306 for determining the amount of pad and the lengths of pads to produce to adequately cushion the container. In such an instance a bar code would be printed on or otherwise affixed to the container 306 or to a packaging invoice supplied with the container and the bar code reader would be positioned to read the bar code as the container is conveyed to or the bar code is placed at a known position relative to the machine 10. Upon reading the information from the bar code, the container probe 302 will transfer the information to the processor 48 which may use the information to instruct the machine 10 to produce the required number and lengths of pads as determined by a look-up table or as directly encoded into the bar code. The operator would then take the pads automatically produced by the machine 10 and place them in the container 306 without further interaction between the operator and the machine.

[0079] The container probe 302 may also be in the form of probe which actually measures the void volume of the container. Such a probe may include a mechanical probe such as a plunger, an air cylinder or other low pressure probe which probes the container 306 to determine the volume of padding necessary to fill the container. A mechanical probe may probe the container 306 in one or in multiple locations to determine the amount of pad needed. The mechanical probe may also be used in conjunction with a bar code reader or used in conjunction with or supplanted with sensors which sense the dimensions or degree of fill of the container 306 including optical and ultrasonic sensors and sensor using other forms of machine vision or pattern recognition.

[0080] A fault tolerant cushioning producing network 400 is illustrated schematically in Figure 13. Such a network 400 would typically include a number of cushioning conversion machines 10 each preferably having a controller 402 such as the controllers 16, 216 and 216' described above for controlling the pad producing and diagnostic functions of the machine. The individual machines 10 would also be controlled by a supervisory controller 404 which may be a devoted supervisory controller implemented in a personal computer or similar processor or may be resident in a cushioning conversion machine in which case it would control its host machine as well as provide supervisory control functions to its host machine and the other machines in the network 400. The supervisory controller 404 may com-

municate with controllers 402 of each machine 10 in a conventional "master-slave" mode or the controllers may communicate with each other in a conventional "peer-to-peer" mode depending on the level of inter-communication between the machines 10 that is desired and whether it is desired to employ a master supervisory controller.

[0081] When the network 400 is operating in the master-slave mode, individual or plural machines 10 are instructed by the supervisory controller 404 to produce pads of the desired number and lengths. The supervisory controller 404 can divide up the work load among the different machines according to work schedules and maintenance schedules of the machines and can bypass or reallocate work from a machine which has informed the supervisory controller of a fault condition, such as a paper jam, or that the machine has run out of paper stock. The machines may also communicate information and fault conditions with each other. While it is preferable that each machine 10 is provided with a separate controller 402, a machine may be controlled through the supervisory controller 404 without the need of an individual controller for each machine.

[0082] When the network 400 is operating in the peer-to-peer mode, a primary or first machine is active producing pads while the remaining machine or machines are inactive. If the first machine fails, the remaining machine or machines can automatically take over for the first machine. Such a network could be implemented between two machines 10a and 10b at either end of a reversible conveyor system 410, as shown in Figure 14. In this case, in normal operation one machine is active while the other machine is idle. The active machine, say machine 10a, produces pads of the desired length and deposits the pads onto the conveyor system 410 which carries the pad away from the active machine 10a and to an operator. If the machine 10a becomes inoperable, such as due to a jam or lack of paper for instance, or a switch is desired at a scheduled intervals, the machine 10a becomes inactive and the machine 10b takes over the pad producing functions. At this time the direction of the conveyor system 410 would also reverse direction to carry pads produced by the machine 10b away from that machine and to an operator.

[0083] While a number of controllers have been described above relative to a number of specific cushioning conversion machines, it will be readily apparent that the controllers of the present invention have a wide range of applications in controlling the operation of many types or configurations of cushioning conversion machines. The versatility and structure of the controllers as well as the provision of spare controller ports also permits customization of controller functions for different machine applications and control of accessory devices.

Claims

1. A cushioning conversion machine for converting a sheet-like stock material into cushioning products; said machine comprising:

a converting assembly including a forming assembly, a feeding assembly, and a cutting assembly, the forming assembly and die feeding assembly cooperating to convert the sheet-like stock material into a three-dimensional strip of dunnage and the cutting assembly cutting die strip of dunnage into lengths, the feeding assembly feeding the stock material to the forming assembly and being operable in a plurality of pre-programmed modes of operation, wherein each of said plurality of modes of operation is controllable to produce cushioning products of different lengths;

a stock supply assembly, positioned upstream of the converting assembly, which supplies the stock material to die forming assembly; and

a controller including:

a selecting device for selecting any one of said plurality of modes of operation;

a plurality of sensing devices for detecting the occurrence of respective predetermined events other than selecting the mode of operation;

a central, programmable processing device which generates control signals based on the selected mode of operation and at least one predetermined event sensed by at least one of the plurality of sensing devices, the processing device being responsive to one of said sensing devices detecting a respective predetermined event in one of the modes of operation and being responsive to a different one of said sensing devices detecting a respective predetermined event in a different one of the modes of operation; and

a controlling device which controls the feeding assembly and the cutting assembly in accordance with the generated control signals.

2. A cushioning conversion machine as set forth in Claim 1 wherein the controlling device also controls the cutting assembly in accordance with the generated control signals.
3. A cushioning conversion machine as set forth in any of the preceding claims wherein the plurality of sensing devices include at least one sensing device which detects an input of one of plurality of predetermined inputs corresponding to different desired

lengths of cushioning product and wherein the processing device is responsive to this sensing device in at least one of the plurality of modes of operation and generates the control signals based thereon.

4. A cushioning conversion machine as set forth in Claim 3 wherein the controlling device activates the feeding assembly for a period of time corresponding to the detected input in said at least one mode of operation. 10
5. A cushioning conversion machine as set forth in any of the preceding claims wherein the plurality of sensing devices include a sensing device which detects removal of a cushioning product from the machine's exit and wherein the processing device is responsive to this sensing device in at least one of the plurality of modes of operation and generates the control signals based thereon. 20
6. A cushioning conversion machine as set forth in Claim 5 wherein the processing device is also responsive to an input of a desired product length in said at least one mode of operation and generates the control signals based thereon. 25
7. A cushioning conversion machine as set forth in Claim 6 wherein the controlling device activates the feeding assembly for a period of time corresponding to the desired length input in said at least one mode of operation. 30
8. A cushioning conversion machine as set forth in any preceding claim wherein the plurality of sensing devices include a sensing device which detects completion of a cutting operation by the cutting assembly and wherein the processing device is responsive to this sensing device in at least one of the plurality of modes of operation and generates control signals based thereon. 35
9. A cushioning conversion machine as set forth in Claim 8 wherein the controlling device activates the feeding assembly upon completion of the cutting operation by the cutting assembly in said at least one mode of operation. 45
10. A cushioning conversion machine as set forth in Claim 8 or Claim 9, wherein the plurality of sensing devices also include a sensing device which detects deactivation of the feeding assembly, and wherein the processing device is also responsive to this sensing device in said at least one mode of operation and generates control signals based thereon, and wherein the controlling device activates the cutting assembly upon deactivation of the feeding assembly in said at least one mode of operation. 50
55

tion.

11. A cushioning conversion machine according to any of Claims 8 to 10 wherein the processing device is further responsive to an input of a desired product length in said at least one mode of operation and generates control signals based thereon. 5
12. A cushioning conversion machine as set forth in Claim 11 wherein the controlling device activates the feeding assembly for a period of time corresponding to the desired product length input in said at least one mode of operation. 10
13. A cushioning conversion machine as set forth in claim 8 or any of Claims 9 to 12 depending therefrom wherein the processing device is further responsive to an input of the desired number of cushioning products in said at least one mode of operation and wherein the controlling device controls the feeding assembly to produce the input number of cushioning products in said at least one mode of operation. 15
14. A cushioning conversion machine as set forth in any of the preceding claims wherein the plurality of sensing devices include a sensing device which detects the activation of a switch for a certain period of time and wherein the processing device is responsive to this sensing device in at least one of the plurality of modes of operation and generates control signals based thereon. 20
15. A cushioning conversion machine as set forth in the preceding claim wherein the controlling device activates the feeding assembly for the period of time that the switch is activated in said at least one mode of operation. 25
16. A cushioning conversion machine as set forth in any preceding claim wherein: 30

the plurality of sensing devices include a sensing device which detects completion of a cutting operation by the cutting assembly, the processing device is responsive to this sensing device in at least one of the plurality of modes of operation and generates control signals based thereon, and the controlling device activates the feeding assembly upon completion of the cutting operation in said at least one mode of operation; and

the plurality of sensing devices also include a sensing device which detects the manual pushing of one or more buttons; the processing device is also responsive to this sensing device in said at least one mode of operation and generates control signals based thereon, and the

controlling device activates the cutting assembly upon the pushing of one or more of the buttons in said at least one mode of operation.

17. A cushioning conversion machine as set forth in Claim 16 wherein the processing device is further responsive to an input of a desired product length in said at least one mode of operation and generates control signals based thereon. 5
18. A cushioning conversion machine as set forth in Claim 17 wherein the controlling device activates the feeding assembly for a period of time corresponding to the desired length input in said at least one mode of operation. 10
19. A cushioning conversion machine as set forth in any preceding claim wherein the cutting assembly may be one of a plurality of different types of cutting assemblies and wherein the controlling device comprises a plurality of output ports for controlling each of the different types of cutting assemblies. 15
20. A cushioning conversion machine as set forth in Claim 19 wherein the plurality of different types of cutting assemblies are: 20
 - a solenoid powered cutting assembly;
 - a fluid-powered cutting assembly; and/or
 - a motor powered cutting assembly. 25
21. A cushioning conversion machine as set forth in any preceding claim depending therefrom wherein the controller further includes a displaying device which displays codes corresponding to: 30
 - the selected the mode of operation;
 - the operational status of the machine;
 - improper operation of the feeding assembly;
 - and/or
 - improper operation of the cutting assembly. 35
22. A cushioning conversion machine as set forth in any of the preceding claims wherein the feeding assembly includes a gear assembly powered by a feed motor and wherein the controlling device controls the feeding assembly by supplying power to the feed motor. 40
23. A method of manufacturing cushioning products, said method comprising the steps of setting the selecting device of a cushioning conversion machine according to any of Claims 1-22 to select one the plurality of modes of operation; and converting sheet-like stock material into cushioning products in this selected mode of operation. 45
24. A method as set forth in Claim 23 including the 50

steps of setting the selecting device to select a different one of the plurality modes of operation; and converting the sheet-like stock material into cushioning products in this different selected mode of operation.

25. Use of a cushioning conversion machine according to any of Claims 1-22 to make cushioning products, said use including:

setting the selecting device to select one of the plurality of modes of operation and converting sheet-like stock material into cushioning products in this selected mode of operation; and setting the selecting device to select a different one of the plurality modes of operation and converting the sheet-like stock material into cushioning products in this different selected mode of operation.

Patentansprüche

1. Maschine zum Herstellen stoßdämpfender Elemente zum Umwandeln eines bahnartigen Ausgangsmaterials in stoßdämpfende Produkte; wobei die Maschine aufweist:

eine Umwandlungsanordnung, die eine Formungsanordnung, eine Zuführungsanordnung und eine Schneideanordnung aufweist, wobei die Formungsanordnung und die Zuführungsanordnung zusammenwirken, um das blattartige Ausgangsmaterial in einen dreidimensionalen Streifen von Füllmaterial umzuwandeln, und die Schneideanordnung den Streifen von Füllmaterial in Längen schneidet, die Zuführungsanordnung das Ausgangsmaterial der Formungsanordnung zuführt und in einer Mehrzahl von vorprogrammierten Betriebsarten betreibbar ist, worin jede der Mehrzahl von Betriebsarten steuerbar ist, um stoßdämpfende Produkte verschiedener Längen zu erzeugen;

eine stromaufwärts der Umwandlungsanordnung positionierte Materiallieferanordnung, die das Ausgangsmaterial an die Formungsanordnung liefert; und

einer Steuerung mit:

- einer Auswahleinrichtung zum Auswählen irgendeiner der Mehrzahl von Betriebsarten;
- einer Mehrzahl von Sensoreinrichtungen zum Erfassen des Auftretens anderer jeweiliger bestimmter Ereignisse als ein Auswählen der Betriebsart;
- einer zentralen programmierbaren Verarbeitungseinrichtung, die Steuersignale erzeugt, die auf der ausgewählten Betriebsart und mindestens einem durch mindestens einer der

- Mehrzahl von Sensoreinrichtungen erfaßten vorbestimmten Ereignis basieren, wobei die Verarbeitungseinrichtung auf eine der Sensoreinrichtungen, die ein jeweiliges vorbestimmtes Ereignis erfaßt, in einer der Betriebsarten anspricht und auf eine andere der Sensoreinrichtungen, die ein jeweiliges vorbestimmtes Ereignis erfaßt, in einer anderen der Betriebsarten anspricht; und einer Steuereinrichtung, die die Zuführungsanordnung und die Schneideanordnung gemäß den erzeugten Steuersignalen steuert.
2. Maschine zum Herstellen stoßdämpfender Elemente nach Anspruch 1, worin die Steuereinrichtung ferner die Schneideanordnung gemäß den erzeugten Steuersignalen steuert.
 3. Maschine zum Herstellen stoßdämpfender Elemente nach einem der vorhergehenden Ansprüche, worin die Mehrzahl von Sensoreinrichtungen mindestens eine Sensoreinrichtung enthält, die eine Eingabe einer von mehreren vorbestimmten Eingaben entsprechend verschiedenen erwünschten Längen eines stoßdämpfenden Produkts erfaßt, und worin die Verarbeitungseinrichtung auf diese Sensoreinrichtung in mindestens einer der Mehrzahl von Betriebsarten anspricht und die darauf basierenden Steuersignale erzeugt.
 4. Maschine zum Herstellen stoßdämpfender Elemente nach Anspruch 3, worin die Steuereinrichtung die Zuführungsanordnung für eine Zeitspanne entsprechend der erfaßten Eingabe in mindestens einer Betriebsart aktiviert.
 5. Maschine zum Herstellen stoßdämpfender Elemente nach einem der vorhergehenden Ansprüche, worin die Mehrzahl von Sensoreinrichtungen eine Sensoreinrichtung enthält, die eine Entnahme eines stoßdämpfenden Produkts aus dem Ausgang der Maschine erfaßt, und worin die Verarbeitungseinrichtung auf diese Sensoreinrichtung in mindestens einer der Mehrzahl von Betriebsarten anspricht und die darauf basierenden Steuersignale erzeugt.
 6. Maschine zum Herstellen stoßdämpfender Elemente nach Anspruch 5, worin die Verarbeitungseinrichtung auch auf eine Eingabe einer gewünschten Produktlänge in mindestens einer Betriebsart anspricht und die darauf basierenden Steuersignale erzeugt.
 7. Maschine zum Herstellen stoßdämpfender Elemente nach Anspruch 6, worin die Steuereinrichtung die Zuführungsanordnung für eine Zeitspanne entsprechend der in mindestens einer Betriebsart
 - einggegebenen gewünschten Länge aktiviert.
 8. Maschine zum Herstellen stoßdämpfender Elemente nach einem der vorhergehenden Ansprüche, worin die Mehrzahl von Sensoreinrichtungen eine Sensoreinrichtung enthält, die einen Abschluß eines Schneidevorgangs durch die Schneideanordnung erfaßt, und worin die Verarbeitungseinrichtung auf diese Sensoreinrichtung in mindestens einer der Mehrzahl von Betriebsarten anspricht und darauf basierende Steuersignale erzeugt.
 9. Maschine zum Herstellen stoßdämpfender Elemente nach Anspruch 8, worin die Steuereinrichtung die Zuführungsanordnung bei Abschluß des Schneidevorgangs durch die Schneideanordnung in mindestens einer Betriebsart aktiviert.
 10. Maschine zum Herstellen stoßdämpfender Elemente nach Anspruch 8 oder Anspruch 9, worin die Mehrzahl von Sensoreinrichtungen auch eine Sensoreinrichtung enthält, die eine Deaktivierung der Zuführungsanordnung erfaßt, und worin die Verarbeitungseinrichtung auch auf diese Sensoreinrichtung in mindestens einer Betriebsart anspricht und darauf basierende Steuersignale erzeugt und worin die Steuereinrichtung die Schneideanordnung auf eine Deaktivierung der Zuführungsanordnung hin in mindestens einer Betriebsart aktiviert.
 11. Maschine zum Herstellen stoßdämpfender Elemente nach einem der Ansprüche 8 bis 10, worin die Verarbeitungseinrichtung ferner auf eine Eingabe einer gewünschten Produktlänge in mindestens einer Betriebsart anspricht und darauf basierende Steuersignale erzeugt.
 12. Maschine zum Herstellen stoßdämpfender Elemente nach Anspruch 11, worin die Steuereinrichtung die Zuführungsanordnung für eine Zeitspanne entsprechend der in mindestens einer Betriebsart eingegebenen gewünschten Produktlänge aktiviert.
 13. Maschine zum Herstellen stoßdämpfender Elemente nach Anspruch 8 oder einem der davon abhängigen Ansprüche 9 bis 12, worin die Verarbeitungseinrichtung ferner auf eine Eingabe der gewünschten Anzahl stoßdämpfender Produkte in mindestens einer Betriebsart anspricht und worin die Steuereinrichtung die Zuführungsanordnung steuert, um die eingegebene Zahl von stoßdämpfenden Produkten in mindestens einer Betriebsart herzustellen.
 14. Maschine zum Herstellen stoßdämpfender Elemente nach einem der vorhergehenden Ansprüche, worin die Mehrzahl von Sensoreinrichtungen

- eine Sensoreinrichtung enthält, die die Aktivierung eines Schalters für eine bestimmte Zeitspanne erfaßt, und worin die Verarbeitungseinrichtung auf diese Sensoreinrichtung in mindestens einer der Mehrzahl von Betriebsarten anspricht und darauf basierende Steuersignale erzeugt.
15. Maschine zum Herstellen stoßdämpfender Elemente nach dem vorhergehenden Anspruch, worin die Steuereinrichtung die Zuführungsanordnung für die Zeitspanne, in der der Schalter aktiviert ist, in mindestens einer Betriebsart aktiviert.
16. Maschine zum Herstellen stoßdämpfender Elemente nach einem der vorhergehenden Ansprüche, worin:
- die Mehrzahl von Sensoreinrichtungen eine Sensoreinrichtung enthält, die einen Abschluß eines Schneidevorgangs durch die Schneideanordnung erfaßt, die Verarbeitungseinrichtung auf diese Sensoreinrichtung in mindestens einer der Mehrzahl von Betriebsarten anspricht und darauf basierende Steuersignale erzeugt und die Steuereinrichtung die Zuführungsanordnung bei Abschluß des Schneidevorgangs in mindestens einer Betriebsart aktiviert; und
- die Mehrzahl von Sensoreinrichtungen auch eine Sensoreinrichtung enthält, die das manuelle Drücken von einem oder mehr Knöpfen erfaßt; die Verarbeitungseinrichtung auch auf diese Sensoreinrichtung in mindestens einer Betriebsart anspricht und darauf basierende Steuersignale erzeugt und die Steuereinrichtung die Schneideanordnung auf das Drücken eines oder mehrerer der Knöpfe hin in mindestens einer Betriebsart aktiviert.
17. Maschine zum Herstellen stoßdämpfender Elemente nach Anspruch 16, worin die Verarbeitungseinrichtung ferner auf eine Eingabe einer gewünschten Produktlänge in mindestens einer Betriebsart anspricht und darauf basierende Steuersignale erzeugt.
18. Maschine zum Herstellen stoßdämpfender Elemente nach Anspruch 17, worin die Steuereinrichtung die Zuführungsanordnung für eine Zeitspanne entsprechend der in mindestens einer Betriebsart eingegebenen gewünschten Produktlänge aktiviert.
19. Maschine zum Herstellen stoßdämpfender Elemente nach einem der vorhergehenden Ansprüche, worin die Schneideanordnung eine von einer Mehrzahl verschiedener Arten von Schneideanordnungen sein kann und worin die Steuereinrichtung
- eine Mehrzahl von Ausgangskanälen zum Steuern von jeder der verschiedenen Arten von Schneideanordnungen aufweist.
20. Maschine zum Herstellen stoßdämpfender Elemente nach Anspruch 19, worin die Mehrzahl der unterschiedlichen Arten von Schneideanordnungen umfaßt:
- eine solenoidbetriebene Schneideanordnung;
eine fluidbetriebene Schneideanordnung;
und/oder
eine motorbetriebene Schneideanordnung.
21. Maschine zum Herstellen stoßdämpfender Elemente nach einem der davon abhängigen vorhergehenden Ansprüche, worin die Steuereinrichtung ferner eine Anzeigevorrichtung enthält, die Codes anzeigt entsprechend:
- der ausgewählten Betriebsart;
dem Betriebsstatus der Maschine;
einem nicht ordnungsgemäßen Betrieb der Zuführungsanordnung; und/oder
einem nicht ordnungsgemäßen Betrieb der Schneideanordnung.
22. Maschine zum Herstellen stoßdämpfender Elemente nach einem der vorhergehenden Ansprüche, worin die Zuführungsanordnung eine Getriebeanordnung enthält, die durch einen Zuführmotor betrieben wird, und worin die Steuereinrichtung die Zuführungsanordnung durch Zuführen von Energie zum Zuführmotor steuert.
23. Verfahren zum Herstellen stoßdämpfender Produkte mit folgenden Schritten: Einstellen der Auswahlvorrichtung einer Maschine zum Herstellen stoßdämpfender Elemente nach einem der Ansprüche 1 - 22, um eine der Mehrzahl von Betriebsarten auszuwählen; und Umwandeln eines blattartigen Ausgangsmaterials in stoßdämpfende Produkte in dieser ausgewählten Betriebsart.
24. Verfahren nach Anspruch 23, mit den Schritten: Einstellen der Auswahlvorrichtung, um eine andere der Mehrzahl von Betriebsarten auszuwählen; und Umwandeln des blattartigen Ausgangsmaterials in stoßdämpfende Produkte in dieser anderen ausgewählten Betriebsart.
25. Anwendung einer Maschine zum Herstellen stoßdämpfender Elemente nach einem der Ansprüche 1 - 22, um stoßdämpfende Produkte herzustellen, wobei die Anordnung einschließt:
- Einstellen der Auswahlvorrichtung, um eine der Mehrzahl von Betriebsarten auszuwählen, und

Umwandeln eines blattartigen Ausgangsmaterials in stoßdämpfende Produkte in dieser ausgewählten Betriebsart; und

Einstellen der Auswahleinrichtung, um eine andere der Mehrzahl von Betriebsarten auszuwählen, und Umwandeln des blattartigen Ausgangsmaterials in stoßdämpfende Produkte in dieser anderen ausgewählten Betriebsart.

Revendications

1. Machine de conversion de garniture d'emballage destinée à convertir un matériau de type feuille en produits de garniture d'emballage ; ladite machine comprenant :

un ensemble de conversion incluant un ensemble de formage, un ensemble d'amenée et un ensemble de découpe, l'ensemble de formage et l'ensemble d'amenée coopérant pour convertir le matériau de type feuille en une bande tridimensionnelle de matériau d'arrimage et l'ensemble de découpe découpant la bande de matériau d'arrimage en longueurs, l'ensemble d'amenée amenant le matériau à l'ensemble de formage et pouvant être actionné selon une pluralité de modes opératoires préprogrammés, dans laquelle chacun de ladite pluralité de modes opératoires peut être commandé pour produire des produits de garniture d'emballage de différentes longueurs ;

un ensemble d'acheminement de matériau, positionné en amont de l'ensemble de conversion, qui achemine le matériau à l'ensemble de formage ; et

un contrôleur incluant :

un dispositif de sélection destiné à sélectionner l'un quelconque de ladite pluralité de modes opératoires ;

une pluralité de dispositifs de détection destinés à détecter l'apparition d'événements prédéterminés respectifs autres que la sélection du mode opératoire ;

un dispositif de traitement programmable central qui génère des signaux de commande sur la base du mode opératoire sélectionné et au moins un événement prédéterminé détecté par au moins l'un de la pluralité de dispositifs de détection, le dispositif de traitement étant sensible à l'un desdits dispositifs de détection détectant un événement prédéterminé respectif dans l'un des modes opératoires et étant sensible à l'un différent desdits dispositifs de détection détectant un événement prédéterminé respectif dans l'un différent des modes opératoires ; et

un dispositif de commande qui commande l'ensemble d'amenée et l'ensemble de

découpe en fonction des signaux de commande générés.

2. Machine de conversion de garniture d'emballage selon la revendication 1, dans laquelle le dispositif de commande commande également l'ensemble de découpe en fonction des signaux de commande générés.
3. Machine de conversion de garniture d'emballage selon l'une quelconque des revendications précédentes, dans laquelle la pluralité de dispositifs de détection incluent au moins un dispositif de détection qui détecte une entrée de l'une de la pluralité des entrées prédéterminées correspondant à différentes longueurs désirées de produit de garniture d'emballage et dans laquelle le dispositif de traitement est sensible à ce dispositif de détection dans au moins l'un de la pluralité de modes opératoires et qui génère les signaux de commande sur la base de celui-ci.
4. Machine de conversion de garniture d'emballage selon la revendication 3, dans laquelle le dispositif de commande active l'ensemble d'amenée pendant une durée correspondant à l'entrée détectée dans ledit au moins un mode opératoire.
5. Machine de conversion de garniture d'emballage selon l'une quelconque des revendications précédentes, dans laquelle la pluralité de dispositifs de détection incluent un dispositif de détection qui détecte le retrait d'un produit de garniture d'emballage de la sortie de la machine et dans laquelle le dispositif de traitement est sensible à ce dispositif de détection dans au moins l'un de la pluralité de modes opératoires, et qui génère les signaux de commande sur la base de celui-ci.
6. Machine de conversion de garniture d'emballage selon la revendication 5, dans laquelle le dispositif de traitement est également sensible à une entrée d'une longueur de produit désirée dans ledit au moins un mode opératoire et qui génère les signaux de commande sur la base de celui-ci.
7. Machine de conversion de garniture d'emballage selon la revendication 6, dans laquelle le dispositif de commande active l'ensemble d'amenée pendant une durée correspondant à l'entrée de longueur désirée dans ledit au moins un mode opératoire.
8. Machine de conversion de garniture d'emballage selon l'une quelconque des revendications précédentes, dans laquelle la pluralité de dispositifs de détection incluent un dispositif de détection qui détecte l'achèvement d'une opération de découpe par l'ensemble de découpe et dans laquelle le dis-

positif de traitement est sensible à ce dispositif de détection dans au moins l'un de la pluralité de modes opératoires et qui génère des signaux de commande sur la base de celui-ci.

9. Machine de conversion de garniture d'emballage selon la revendication 8, dans laquelle le dispositif de commande active l'ensemble d'amenée lors de l'achèvement de l'opération de découpe par l'ensemble de découpe dans ledit au moins un mode opératoire. 5
10. Machine de conversion de garniture d'emballage selon la revendication 8 ou 9, dans laquelle la pluralité de dispositifs de détection incluent également un dispositif de détection qui détecte la désactivation de l'ensemble d'amenée, et dans laquelle le dispositif de traitement est également sensible à ce dispositif de détection dans ledit au moins un mode opératoire et qui génère des signaux de commande sur la base de celui-ci, et dans laquelle le dispositif de commande active l'ensemble de découpe lors de la désactivation de l'ensemble d'amenée dans ledit au moins un mode opératoire. 10
11. Machine de conversion de garniture d'emballage selon l'une quelconque des revendications 8 à 10, dans laquelle le dispositif de traitement est sensible, en outre, à une entrée d'une longueur de produit désirée dans ledit au moins un mode opératoire et qui génère des signaux de commande sur la base de celui-ci. 15
12. Machine de conversion de garniture d'emballage selon la revendication 11, dans laquelle le dispositif de commande active l'ensemble d'amenée pendant une durée correspondant à l'entrée de longueur de produit désirée dans ledit au moins un mode opératoire. 20
13. Machine de conversion de garniture d'emballage selon la revendication 8 ou l'une quelconque des revendications 9 à 12 qui en dépendent, dans laquelle le dispositif de traitement est sensible, en outre, à une entrée d'un nombre désiré de produits de garniture d'emballage dans ledit au moins un mode opératoire et dans laquelle le dispositif de commande commande l'ensemble d'amenée afin de produire le nombre entré de produits de garniture d'emballage dans ledit au moins un mode opératoire. 25
14. Machine de conversion de garniture d'emballage selon l'une quelconque des revendications précédentes, dans laquelle la pluralité de dispositifs de détection incluent un dispositif de détection qui détecte l'activation d'un commutateur pendant une certaine durée et dans laquelle le dispositif de traitement est sensible à ce dispositif de traitement dans au moins l'un de la pluralité de modes opératoires et qui génère des signaux de commande sur la base de celui-ci. 30

tement est sensible à ce dispositif de traitement dans au moins l'un de la pluralité de modes opératoires et qui génère des signaux de commande sur la base de celui-ci.

15. Machine de conversion de garniture d'emballage selon la revendication précédente, dans laquelle le dispositif de commande active l'ensemble d'amenée pendant la durée durant laquelle le commutateur est activé dans ledit au moins un mode opératoire. 35
16. Machine de conversion de garniture d'emballage selon l'une quelconque des revendications précédentes, dans laquelle : 40

la pluralité de dispositifs de détection incluent un dispositif de détection qui détecte l'achèvement d'une opération de découpe par l'ensemble de découpe, le dispositif de traitement est sensible à ce dispositif de détection dans au moins l'un de la pluralité de modes opératoires et génère des signaux de commande sur la base de celui-ci, et le dispositif de commande active l'ensemble d'amenée lors de l'achèvement de l'opération de découpe dans ledit au moins un mode opératoire ; et la pluralité de dispositifs de détection incluent également un dispositif de détection qui détecte la poussée manuelle de l'un ou de plusieurs boutons ; le dispositif de traitement est également sensible à ce dispositif de détection dans ledit au moins un mode opératoire et génère des signaux de commande sur la base de celui-ci, et le dispositif de commande active l'ensemble de découpe lors de la poussée de l'un ou de plusieurs des boutons dans ledit au moins un mode opératoire. 45
17. Machine de conversion de garniture d'emballage selon la revendication 16, dans laquelle le dispositif de traitement est sensible, en outre, à une entrée d'une longueur de produit désirée dans ledit au moins un mode opératoire et génère des signaux de commande sur la base de celui-ci. 50
18. Machine de conversion de garniture d'emballage selon la revendication 17, dans laquelle le dispositif de commande active l'ensemble d'amenée pendant une durée correspondant à l'entrée de longueur désirée dans ledit au moins un mode opératoire. 55
19. Machine de conversion de garniture d'emballage selon l'une quelconque des revendications précédentes, dans laquelle l'ensemble de découpe peut être l'un d'une pluralité de différents types d'ensembles de découpe et dans laquelle le dispositif de commande comprend une pluralité d'orifices de

sortie destinés à commander chacun des différents types d'ensembles de découpe.

20. Machine de conversion de garniture d'emballage selon la revendication 19, dans laquelle la pluralité de différents types d'ensembles de découpe sont :

un ensemble de découpe à commande par électro-aimant ;
un ensemble de découpe à commande hydraulique ; et/ou
un ensemble de découpe à commande motorisée.

21. Machine de conversion de garniture d'emballage selon l'une quelconque des revendications précédentes, dans laquelle le contrôleur inclut, en outre, un dispositif d'affichage qui affiche les codes correspondant :

au mode opératoire sélectionné ;
à l'état opérationnel de la machine ;
au fonctionnement défectueux de l'ensemble d'amenée ; et/ou
au fonctionnement défectueux de l'ensemble de découpe.

22. Machine de conversion de garniture d'emballage selon l'une quelconque des revendications précédentes, dans laquelle l'ensemble d'amenée inclut un ensemble d'engrenage commandé par un moteur d'entraînement et dans laquelle le dispositif de commande commande l'ensemble d'amenée en alimentant le moteur d'entraînement en énergie.


23. Procédé de fabrication de produits de garniture d'emballage, ledit procédé comprenant les étapes consistant à régler le dispositif de sélection d'une machine de conversion de garniture d'emballage selon l'une quelconque des revendications 1 à 22 de manière à sélectionner l'un de la pluralité de modes opératoires ; et à convertir le matériau de type feuille en produits de garniture d'emballage dans ce mode opératoire sélectionné.

24. Procédé selon la revendication 23, incluant les étapes consistant à régler le dispositif de sélection de manière à sélectionner l'un différent de la pluralité de modes opératoires ; et à convertir le matériau de type feuille en produits de garniture d'emballage dans ce mode opératoire sélectionné différent.

25. Utilisation d'une machine de conversion de garniture d'emballage selon l'une quelconque des revendications 1 à 22 afin de fabriquer des produits de garniture d'emballage, ladite utilisation incluant :

le réglage du dispositif de sélection de manière

à sélectionner l'un de la pluralité de modes opératoires et la conversion de matériau de type feuille en produits de garniture d'emballage dans ce mode opératoire sélectionné ; et le réglage du dispositif de sélection de manière à sélectionner l'un différent de la pluralité de modes opératoires et la conversion du matériau de type feuille en produits de garniture d'emballage dans ce mode opératoire sélectionné différent.

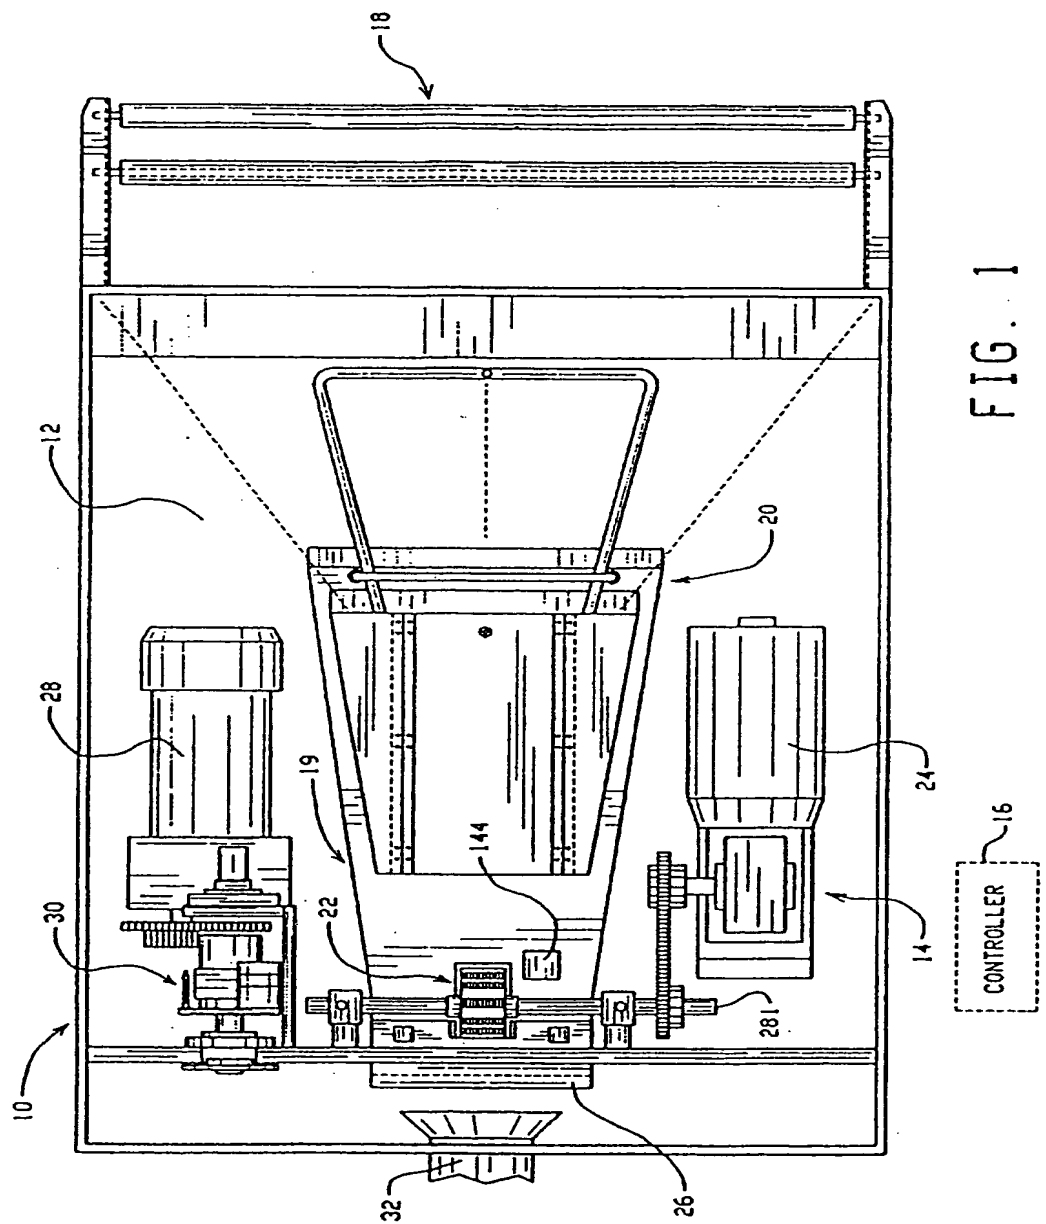



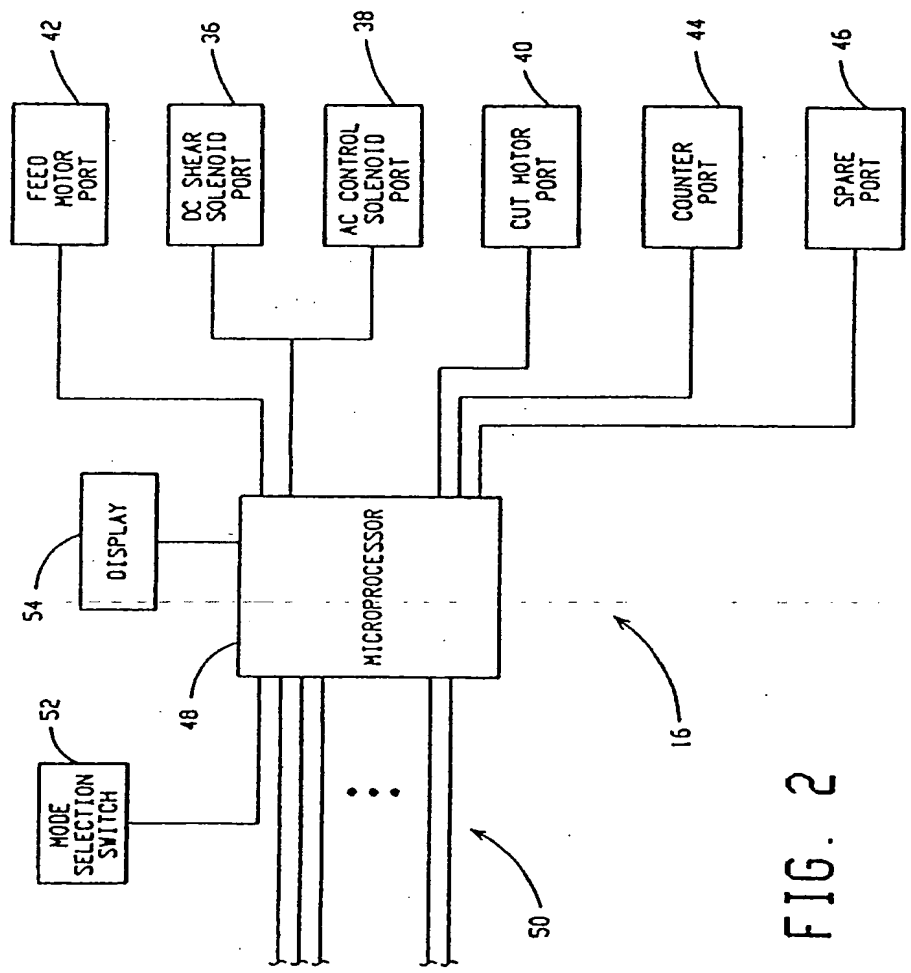


FIG. 2

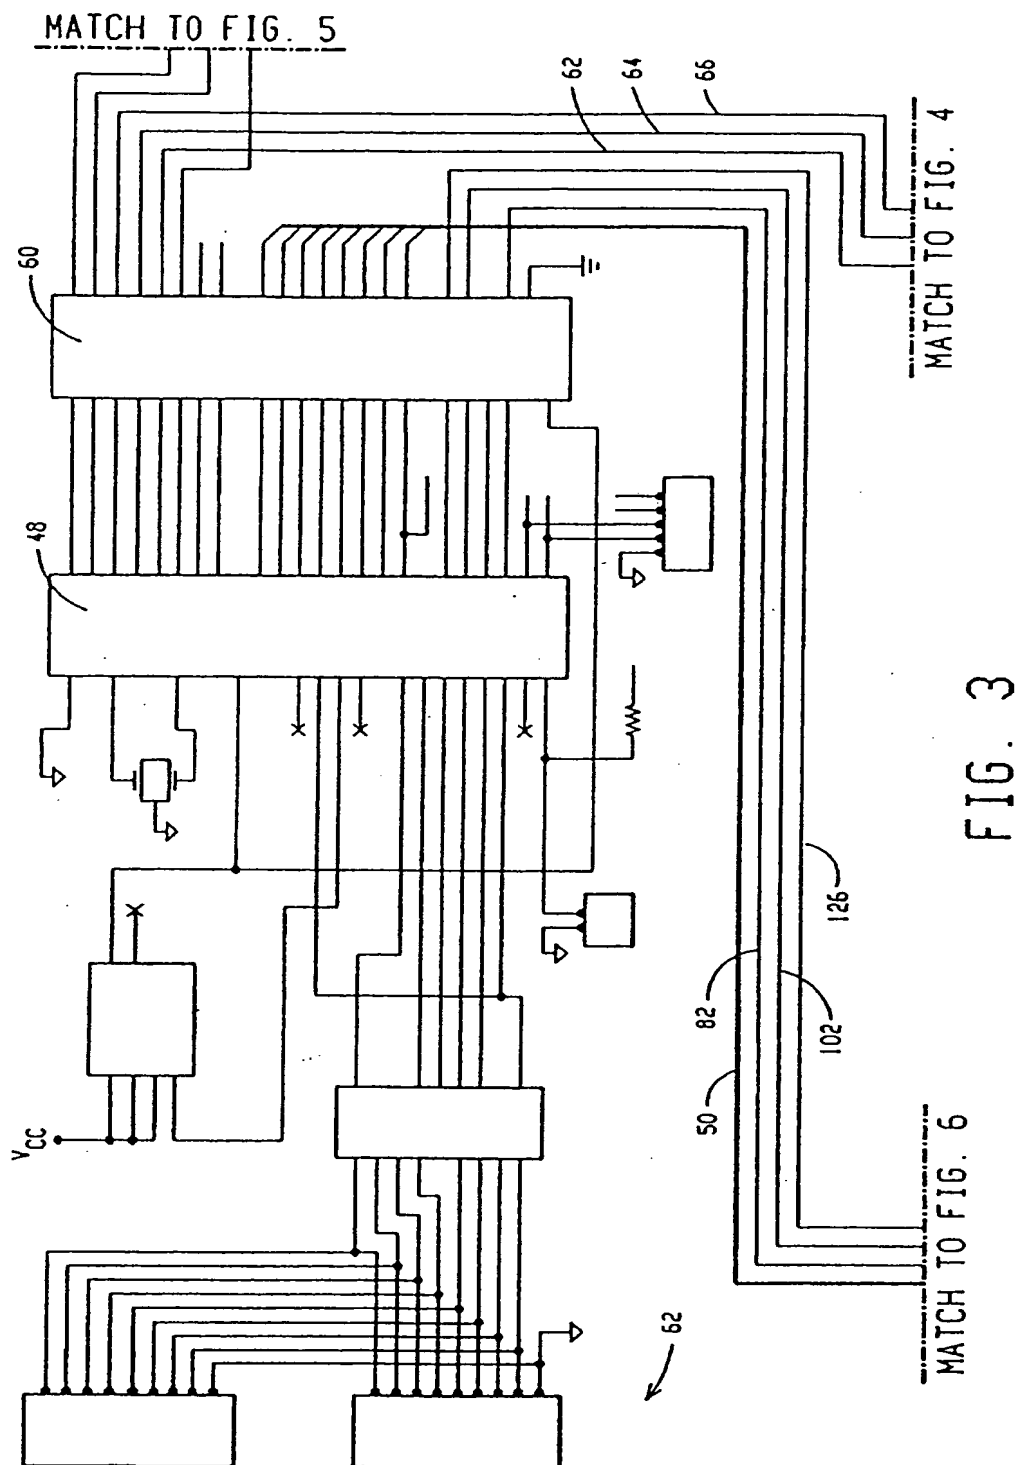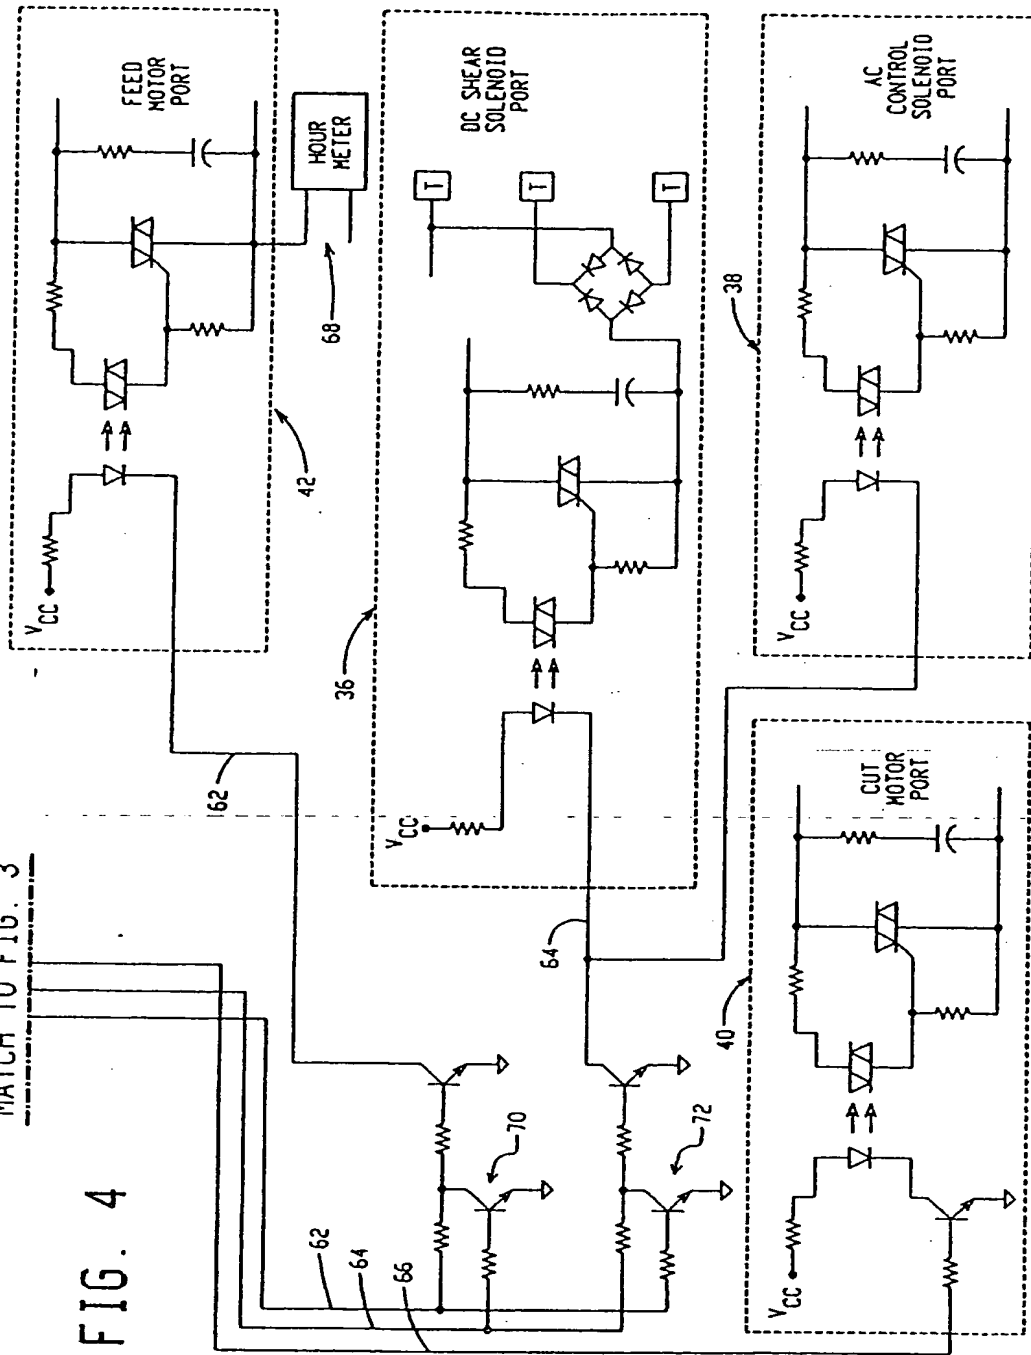

MATCH TO FIG. 3

FIG. 4



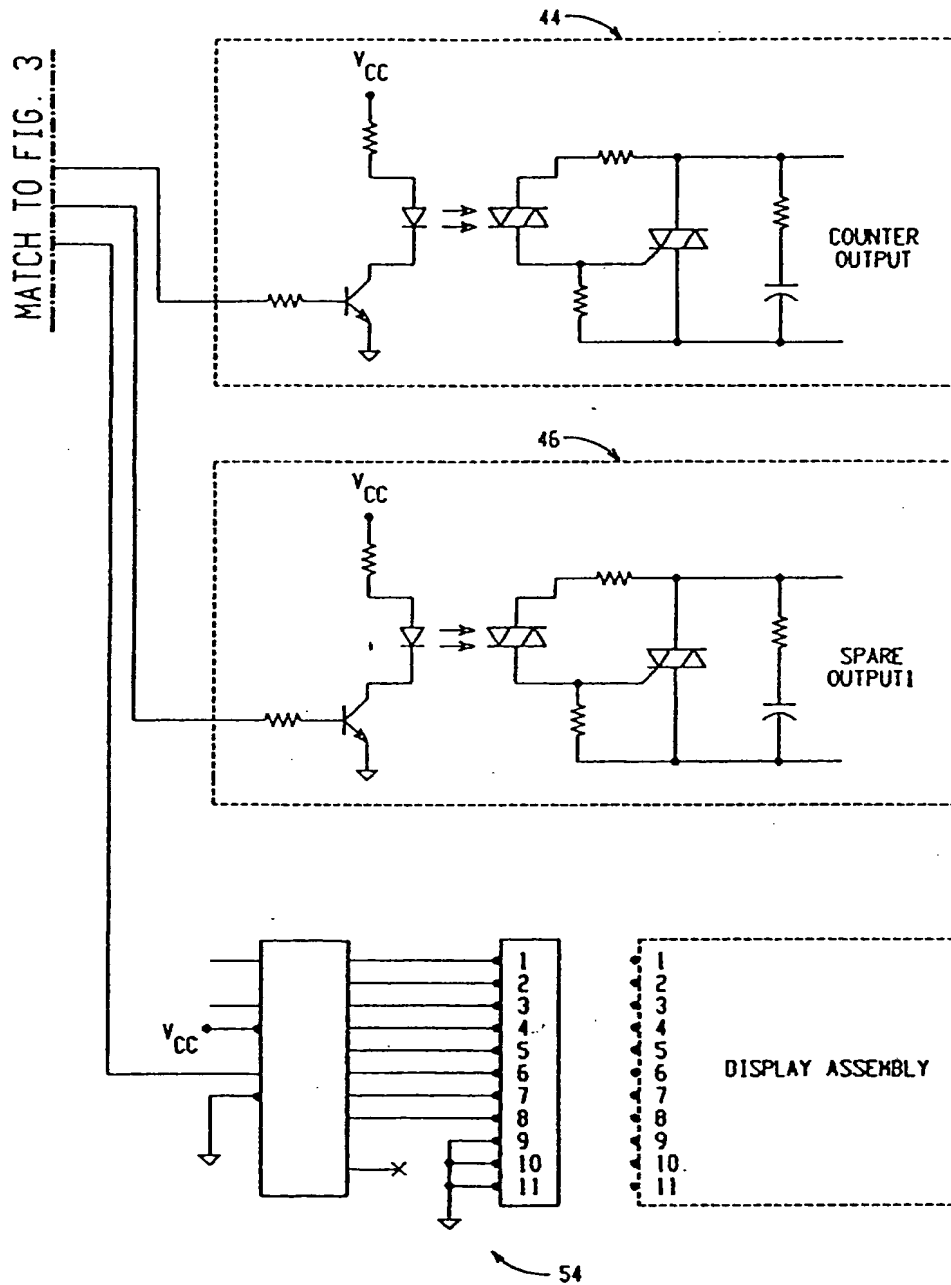
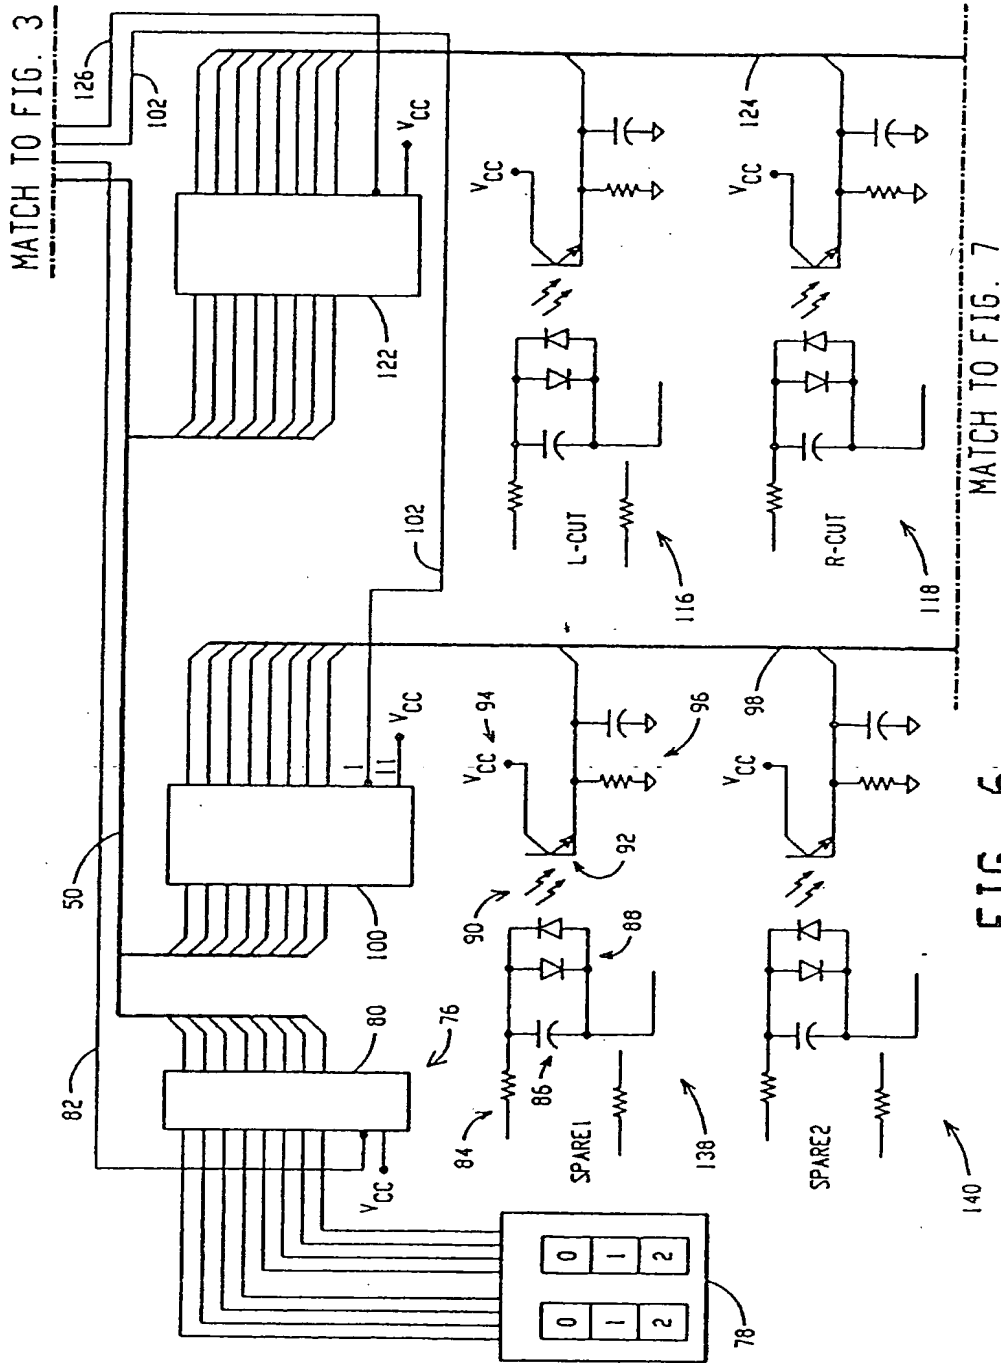
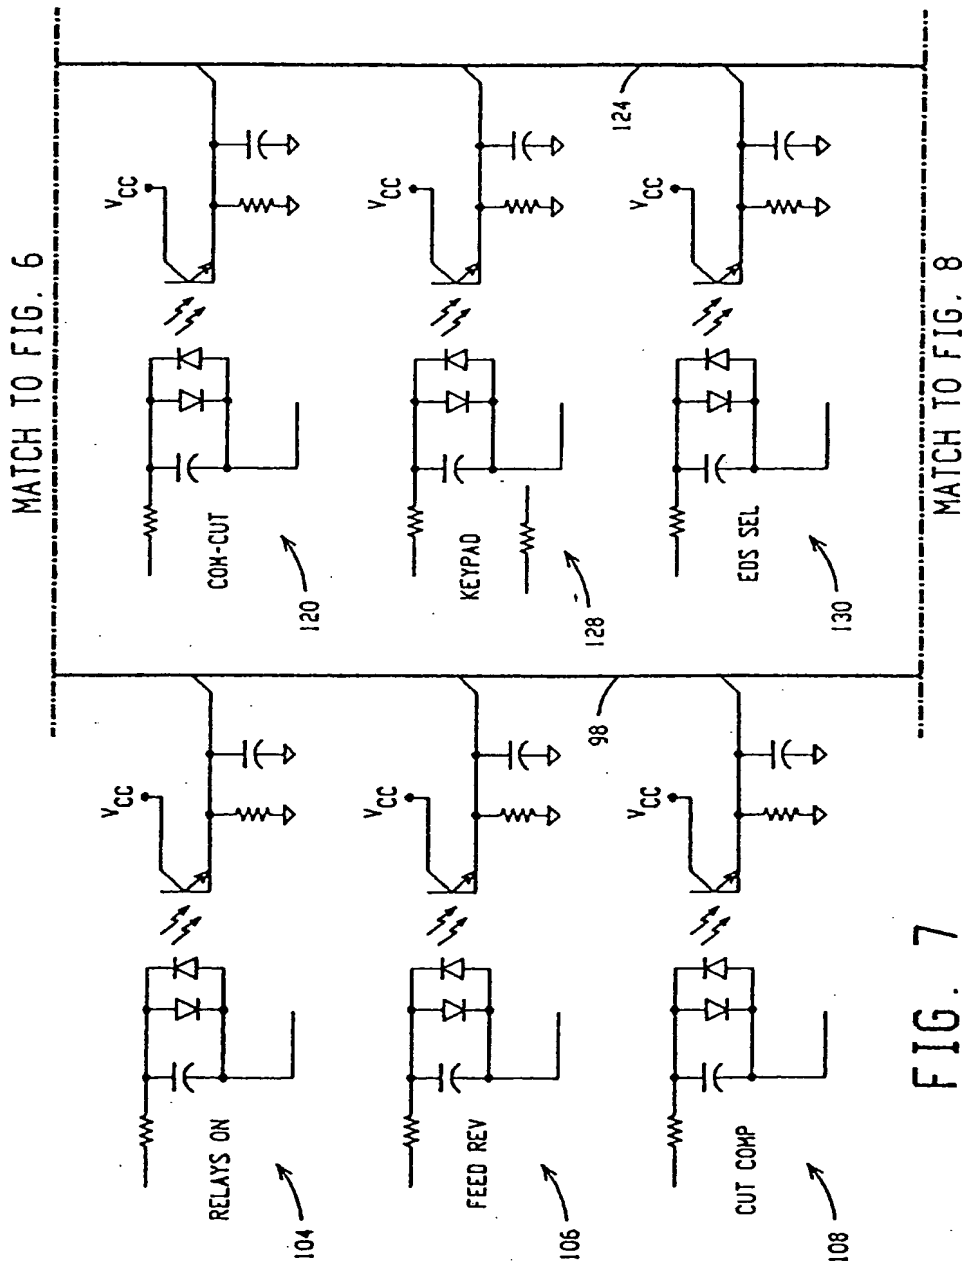
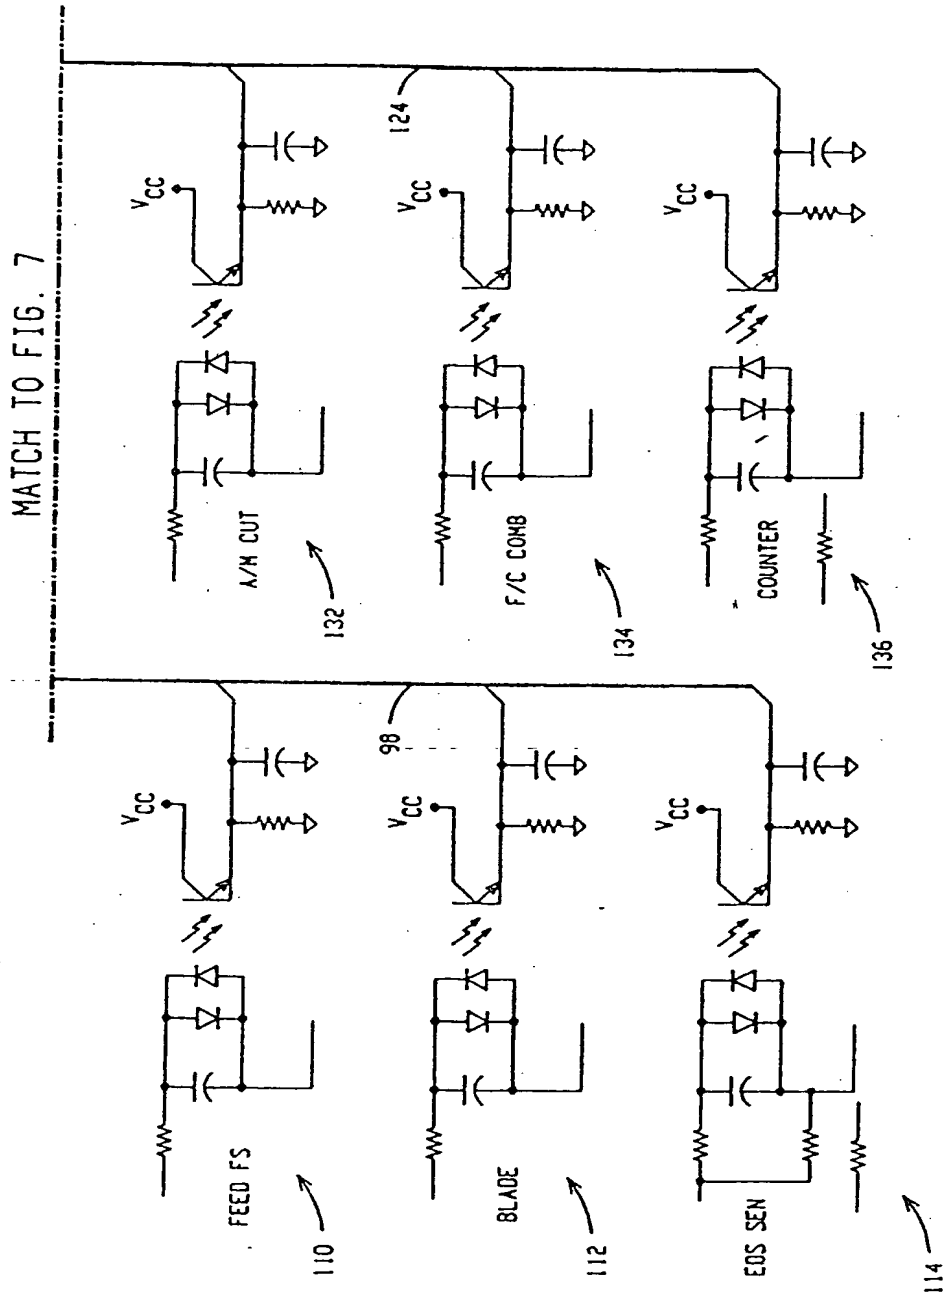


FIG. 5







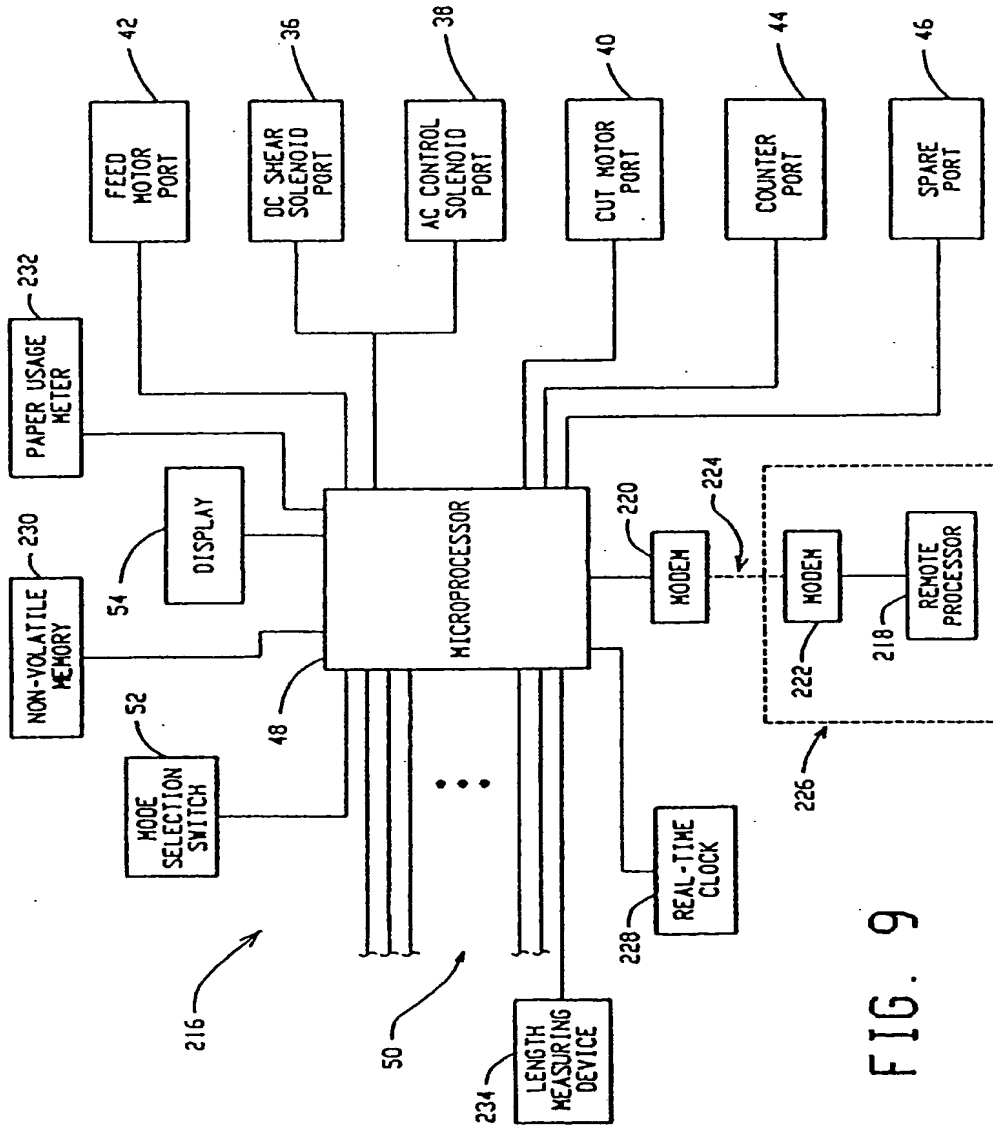


FIG. 9

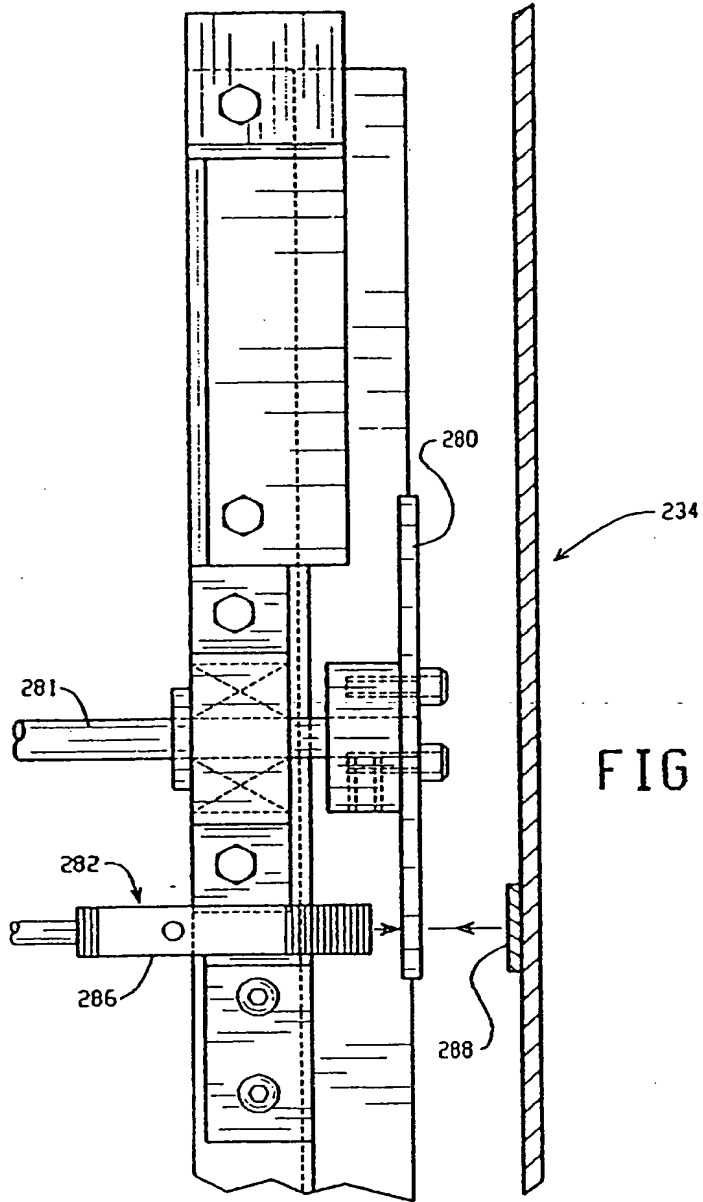
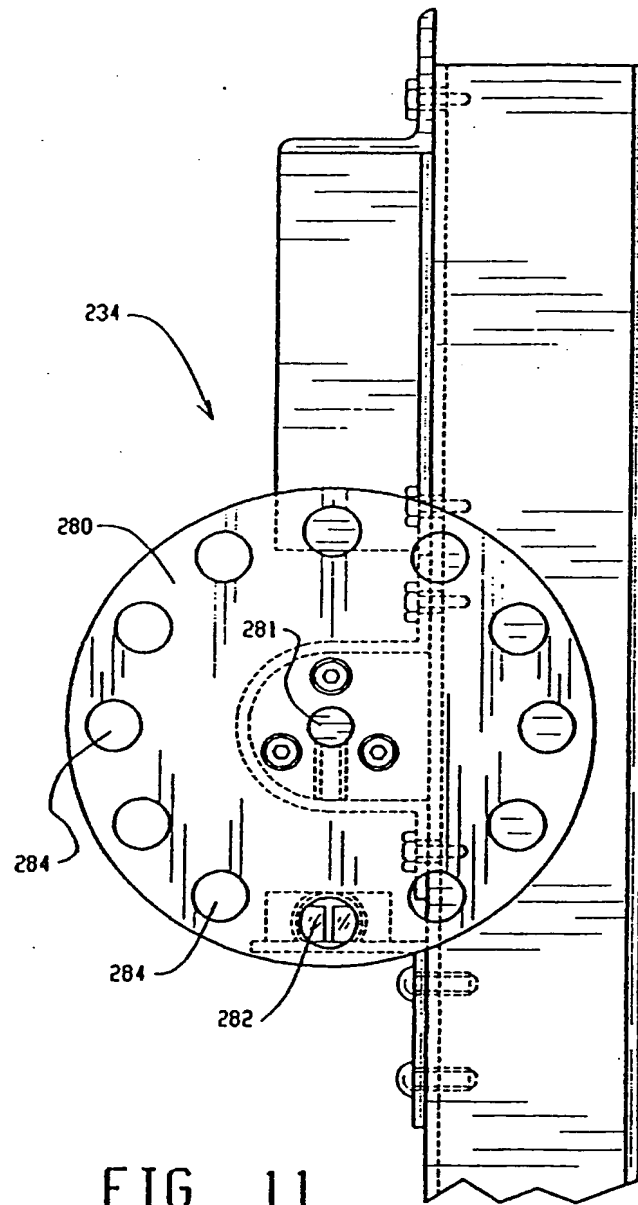


FIG. 10



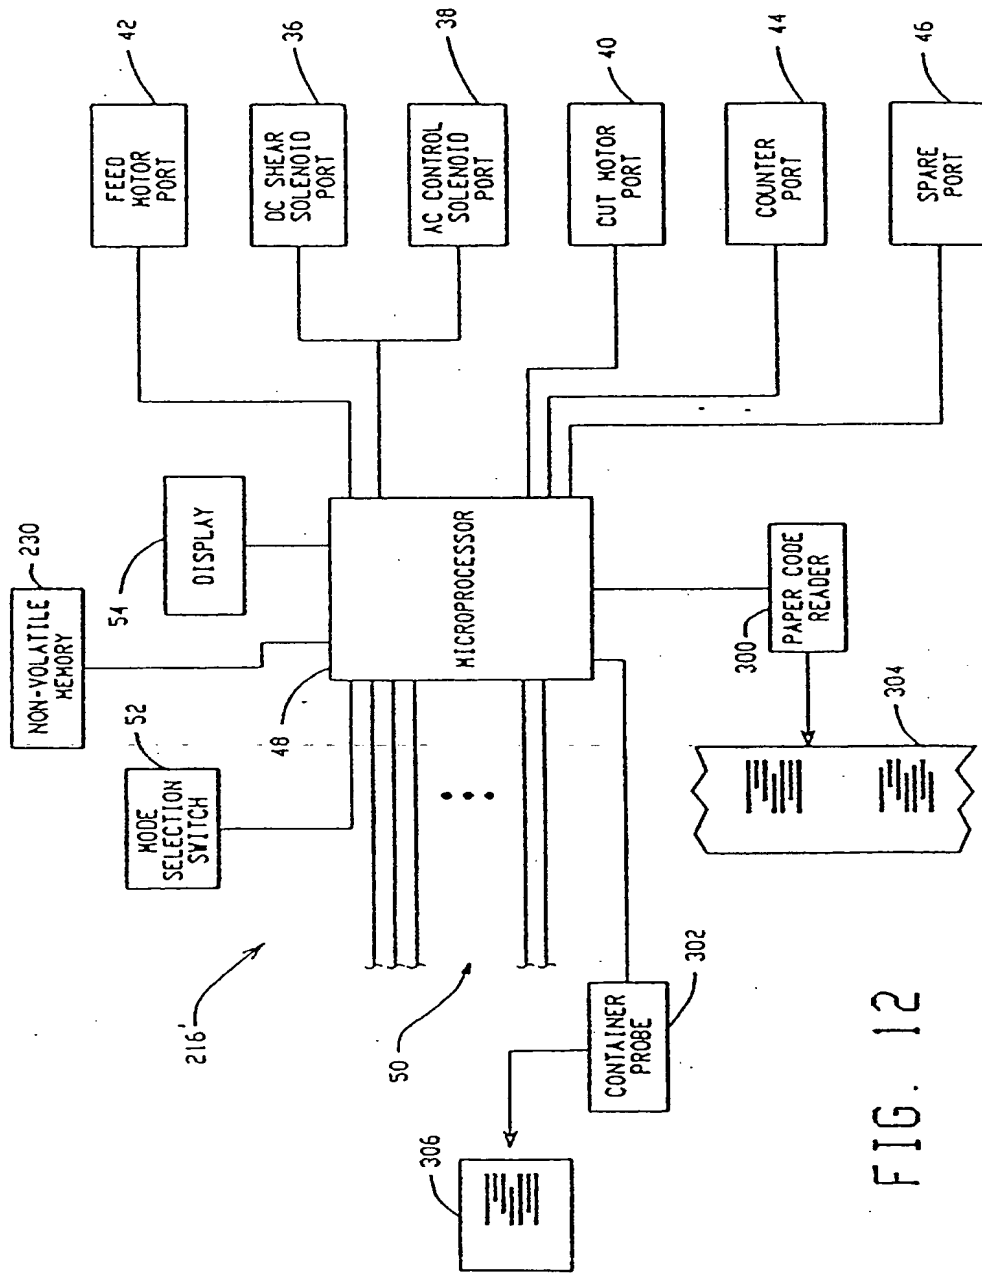


FIG. 12

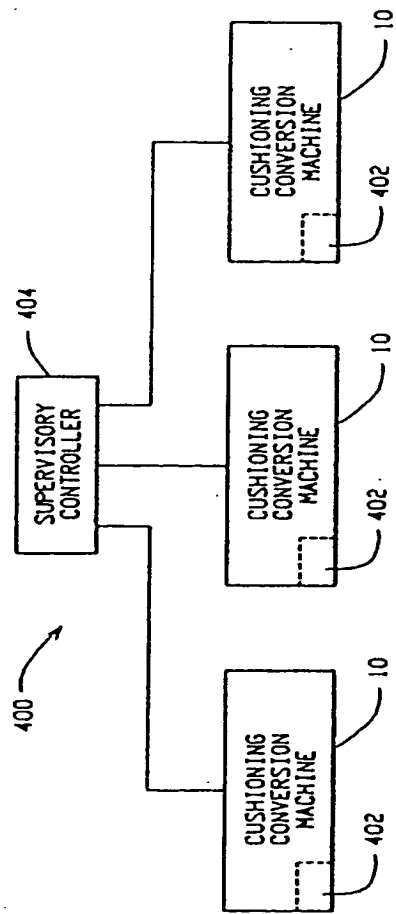


FIG. 13

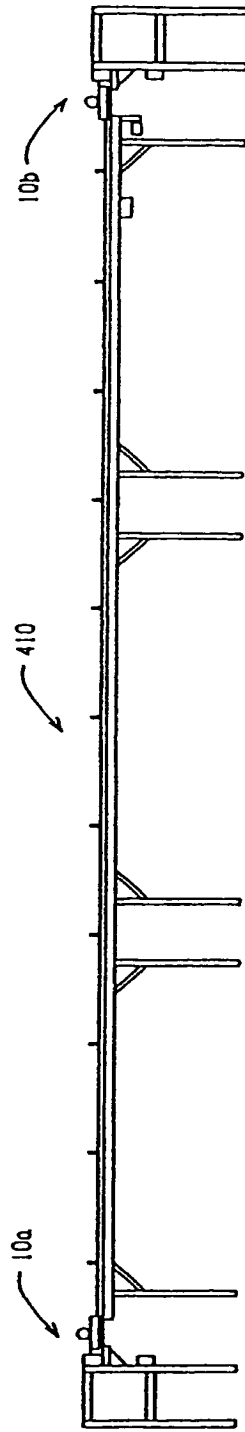


FIG. 14

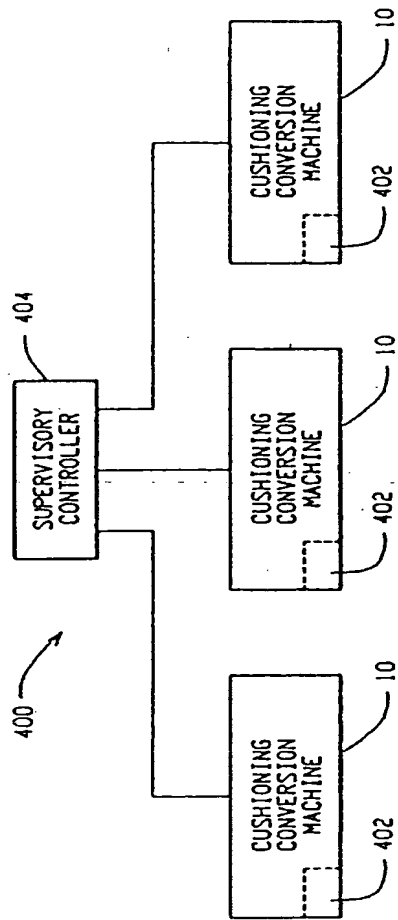


FIG. 13

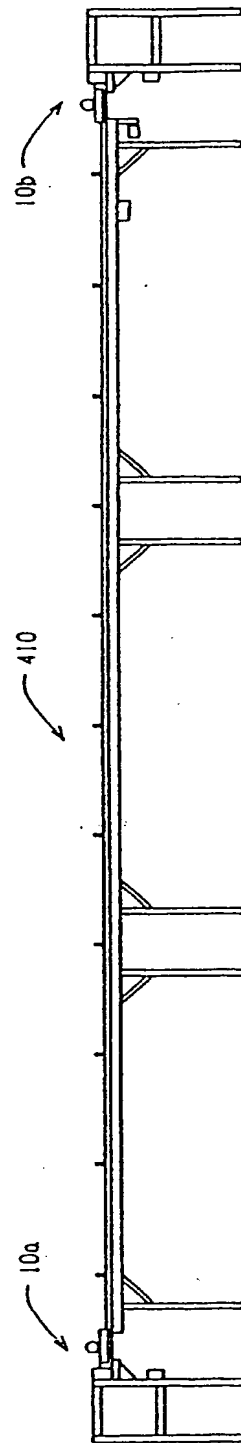


FIG. 14

THIS PAGE BLANK (USPTO)